

PIEZO FILTERS

INTRODUCTION

For more than two decades, ceramic filter technology has been instrumental in the proliferation of solid state electronics. A view of the future reveals that even greater expectations will be placed on piezoelectric material in the area of new applications and for more stringent performance criteria in current products. Traditionally, nearly all low and high-end AM and FM commercial radios use ceramic band-pass filters. However, applications are also found in cordless telephones, cellular systems, 2-way communications, and the television industry.

As a world leader in the development of piezo ceramic filter technology, Murata Electronics had been able to develop specialized ceramic materials which when combined with an advance filter design have resulted in a complete line of practical, inexpensive ceramic filters for entertainment and communications applications. In this catalog, the principle of ceramic filters, the design of representative test circuits

and specifications concerning various models are described.

PIEZOELECTRIC THEORY AS APPLIED TO CERAMIC FILTERS

All ceramic filters derive their basic frequency selectivity from a mechanical vibration resulting from a piezoelectric effect. While a total theoretical analysis of piezoelectric technology as applied to ceramic filters is very complex, it can be shown as the equivalent circuit as illustrated in Fig. 430-1. This equivalent circuit represents a typical two-terminal filter, a device which forms the basic building block for more complex filters.

The resonant frequency of this device is calculated by the equation:

$$f_r = \frac{1}{2\pi \sqrt{L_1 C_1}}$$

The anti-resonant frequency is expressed as:

$$f_a = \frac{1}{2\pi \sqrt{\frac{C_1 C_0}{L_1 (C_1 + C_0)}}}$$

This filter exhibits the impedance shown in Fig. 430-2.

Two-terminal filters are typically used as emitter bypasses and they exhibit the frequency characteristics shown in Fig. 430-3.

Three-terminal ceramic filters can be used as inter-stage coupling devices as shown in Fig. 430-4. By using our filters in this manner, increased selectivity, improved band pass characteristics, reliability and stability can be obtained without increasing circuit complexity or parts count.

By cascading two or more filters as shown in Figs. 431-5 and 6, Murata can greatly enhance selectivity. By controlling the coefficient of electromechanical coupling between the filter elements, bandwidth can be "peaked" or "flattened." Typical 455kHz response curves are shown in Figs. 431-7 and 8.

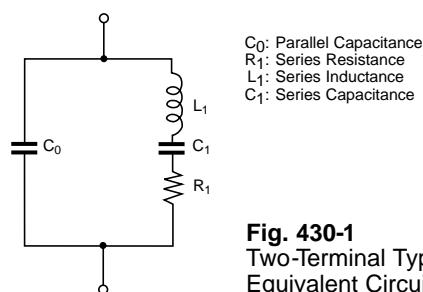


Fig. 430-1
Two-Terminal Type
Equivalent Circuit

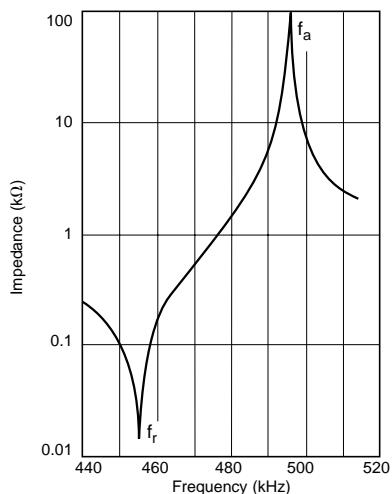


Fig. 430-2
Typical Impedance vs
Frequency Response Curve For
A Two-Terminal Device

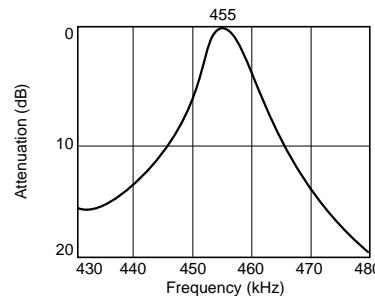


Fig. 430-3
Typical Attenuation Characteristics
For A 455kHz (Two-Terminal)
Ceramic Filter

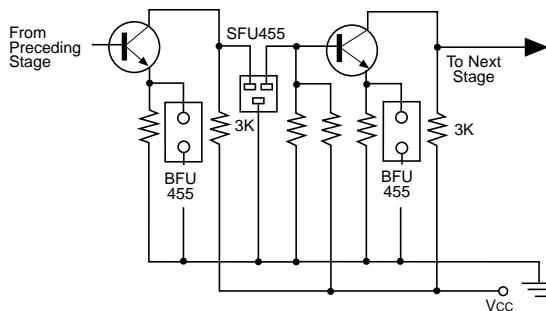


Fig. 430-4
Three-Terminal
Filter Used As Inter-Stage
Coupling Device




Fig. 431-5
Ladder Connection

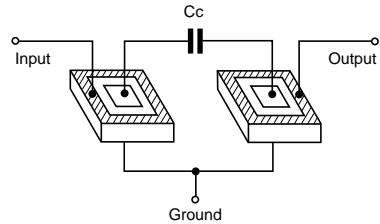


Fig. 431-6
Cascade Connection

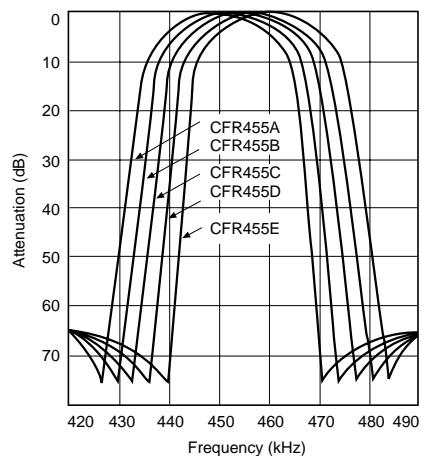


Fig. 431-7
Typical Response Curves For
CFR455 A-E Series Ceramic Filters

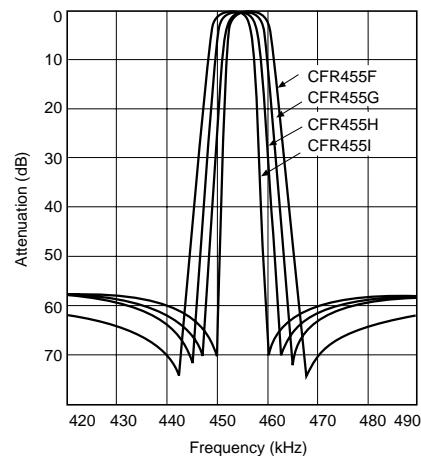


Fig. 431-8
Typical Response Curves For
CFR455 F-I Series Ceramic Filters

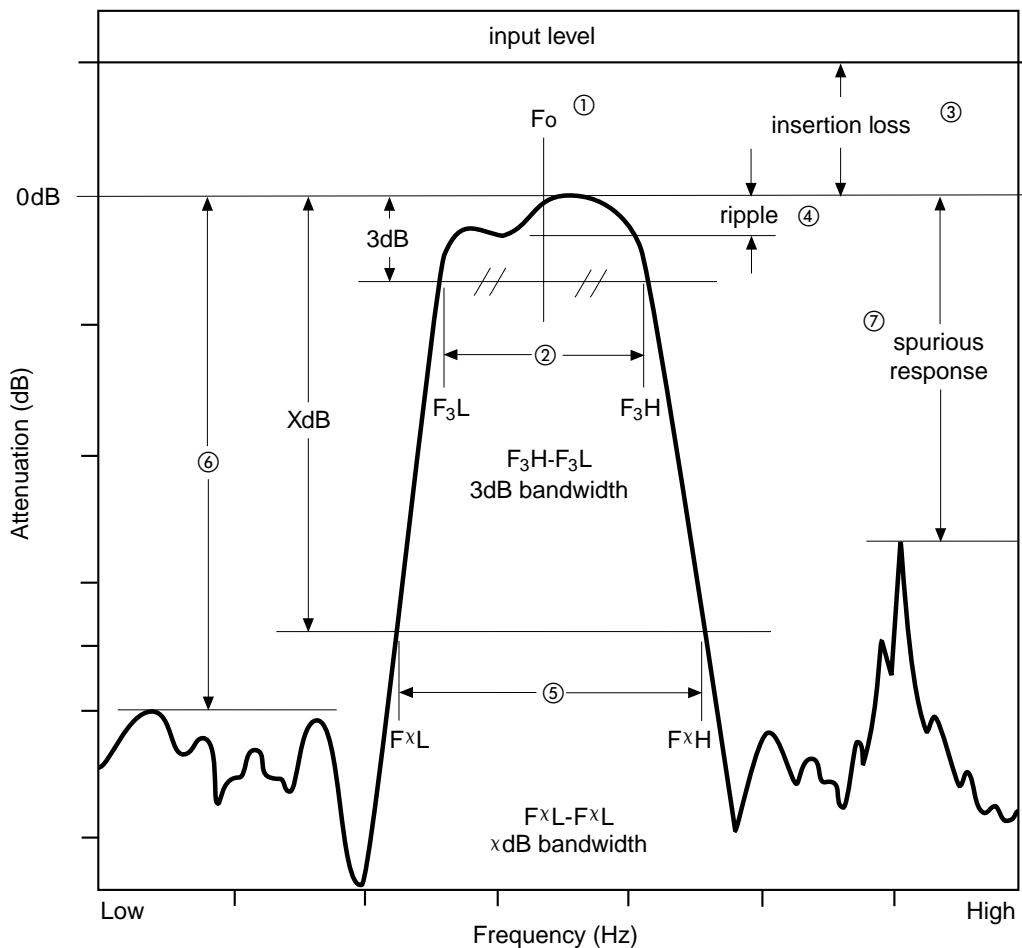


Fig. 431-9
Graphical Representation of Ceramic Filter Terminology

CERAMIC FILTER TERMINOLOGY

Although the previous section has presented a concise discussion of piezoelectric theory as applied to ceramic filter technology, it is necessary that the respective terminology used in conjunction with ceramic filters be discussed before any further examination of ceramic filter technology is made.

Using Fig. 431-9 as a typical model of a response curve for a ceramic filter, it can be seen that there are a number of relevant factors to be considered in specifying ceramic filters. These include: center frequency, pass-bandwidth,

insertion loss, ripple, attenuation bandwidth, stopband attenuation, spurious response and selectivity. Although not all of these factors will apply to each filter design, these are the key specifications to consider with most filters. From the symbol key shown in Table 432-1 below, a thorough understanding of this basic terminology should be possible.

IMPEDANCE MATCHING

As it is imperative to properly match the impedances whenever any circuit is connected to another circuit, any component to another component, or any circuit to another component, it is also important that this be taken into account in using ceramic filters.

Without proper impedance matching, the operational characteristics of the ceramic filters cannot be met.

Fig. 433-12 illustrates a typical example of this requirement.

This example shows the changes produced in the frequency characteristics of the SFZ455A ceramic filter when the resistance values are altered. For instance, if the input/output impedances R_1 and R_2 are connected to lower values than those specified, the insertion loss increases, the center frequency shifts toward the low side and the ripple increases.

TABLE 432-1 – CERAMIC FILTER TERMINOLOGY CHART

Numbers In Fig. 431-9	Terminology	Symbol	Unit	Explanation of Term
1	Center Frequency	f_o	Hz	The frequency in the center of the pass-bandwidth. However, the center frequency for some products is expressed as the point where the loss is at its lowest point.
2	Pass-bandwidth (3dB Bandwidth)	(3dB) B.W.	Hz	Signifies a difference between the two frequencies where the attenuation becomes 3dB from the level of the minimum loss point.
3	Insertion Loss	I.L.	dB	Expressed as the input/output ratio at the point of minimum loss. (The insertion loss for some products is expressed as the input/output ratio at the center frequency.) Insertion loss = $20 \log (V_2/V_1)$ in dB.
4	Ripple	—	dB	If there are peaks and valleys in the pass-bandwidth, the ripple expresses the difference between the maximum peak and the minimum valley.
5	Attenuation Bandwidth (dB Bandwidth)	20 (dB) (B.W.)	Hz	The bandwidth at a specified level of attenuation. Attenuation may be expressed as the ratio of the input signal strength to the output signal strength in decibels.
6	Stopband Attenuation	—	dB	The level of signal strength at a specified frequency outside of the passband.
7	Spurious Response	SR	dB	The difference in decibels between the insertion loss and the spurious signal in the stopband.
	Input/Output Impedance	—	Ohm	Internal impedance value of the input and output of the ceramic filter
	Selectivity	—	dB	The ability of a filter to pass signals of one frequency and reject all others. A highly selective filter has an abrupt transition between a passband region and the stopband region. This is expressed as the shape factor—the attenuation bandwidth divided by the pass - bandwidth. The filter becomes more selective as the resultant value approaches one.

On the other hand, if R_1 and R_2 are connected to higher values other than those specified, the insertion loss will increase, the center frequency will shift toward the high side and the ripple will increase.

DEALING WITH SPURIOUS RESPONSE

Frequently in using 455kHz filters, spurious will cause problems due to the fact that the resonance occurs under an alien vibrating mode or overtone deviating from the basic vibration characteristics. Among available solutions for dealing with spurious response are:

1. The use of a supplementary IFT together with the ceramic filter for suppression of the spurious.
2. The arrangement of two or more ceramic filters in parallel for the mutual cancellation of spurious.
3. The addition of a low-pass or high-pass LC filter for suppression of spurious. Perhaps the most commonly used method of dealing

with spurious is the use of a supplementary IFT in conjunction with the ceramic filter. The before and after effects of the use of an IFT are shown in Figs. 433-10 and 11. In Fig. 433-10, only a single SFZ455A ceramic filter is employed and spurious is a significant problem. With the addition of an IFT, the spurious problem is reduced as is shown in Fig. 433-11.

Although spurious is a significant problem to contend with when using 455kHz ceramic filters, it is not a problem in 4.5MHz and 10.7MHz ceramic filters, as their vibration modes are significantly different.

CONSIDERATIONS FOR GAIN DISTRIBUTION

Since the impedance of both the input and output values of the ceramic filters are symmetric and small, it is necessary that the overall gain distribution within the circuit itself be taken into consideration. For instance, in the discussion concerning proper impedance matching, it was illustrated

that a certain DC loss occurs if the recommended resistance values are not used. This can cause an overall reduction in the gain which could present a problem if no allowances have been made for the corresponding loss. To compensate for this problem, it is recommended that the following be done:

1. The amplifier stage should be designed to compensate for this loss.
2. The ceramic filter should be used in combination with the IFT for minimizing both matching and DC losses. The IFT should be used strictly as a matching transformer and the ceramic filter only for selectivity.

As the use of IC's has become more prevalent with ceramic filters, these considerations have been taken into account. It should be noted that few of the problems discussed above have been realized when more than three (3) IF stages have been employed.

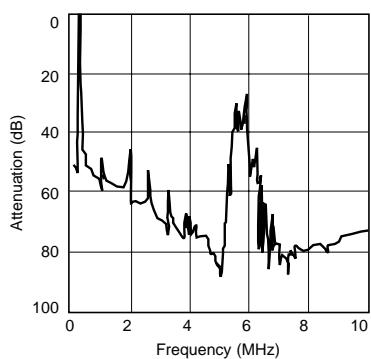


Fig. 433-10
Spurious Response With Model SFZ455A Ceramic Filter

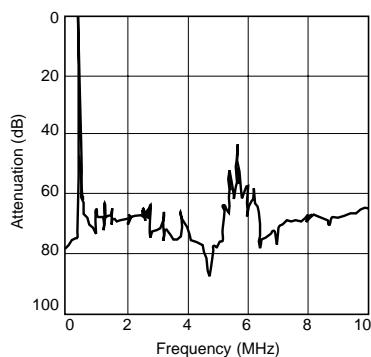


Fig. 433-11
Spurious Response With Model SFZ455A Ceramic Filter And IFT

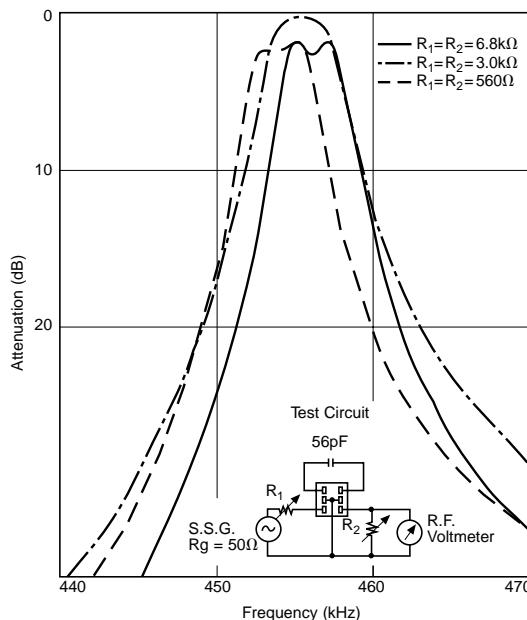


Fig. 433-12
Model SFZ455A Ceramic Filter Matching Impedance vs. Pass-Band Characteristics

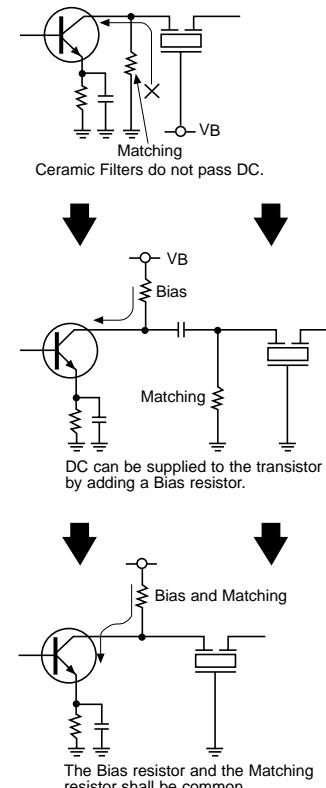


Fig. 433-13
Coupling With A Transistor

CERAMIC FILTERS DO NOT PASS DC

It is important to note in designing circuits that ceramic filters are incapable of passing DC. As is illustrated in Fig. 433-13, in a typical circuit where a transistor is used, a bias circuit will be required to drive the transistor. Since the ceramic filter requires matching resistance to operate properly, the matching resistor shown in the diagram can play a dual role as both a matching and bias resistor.

If the bias circuit is used, it is important that the parallel circuit of both the bias resistance and the transistor's internal resistance be taken into consideration in meeting the resistance values. This is necessary since the internal resistance of the transistor is changed by the bias resistance. However, when an IC is used, there is no need for an additional bias circuit since the IC has a bias circuit within itself.

Here it is recommended that an IFT be used for impedance matching with the ceramic filter when coupling with a mixer stage, as shown in Fig. 434-14.




Fig. 434-14
Coupling From Mixer Stage

COUPLING CAPACITANCE

The SFZ455A is composed of two filter elements which must be connected by a coupling capacitor. Moreover, the frequency characteristic changes according to the coupling capacitance (C_c). As shown in Fig. 434-15, the larger the coupling capacitance (C_c) becomes, the wider the bandwidth and more the ripple increases. Conversely, the smaller the coupling capacitance becomes, the narrower the bandwidth becomes and the more the insertion loss increases. Therefore, the specified value of the coupling capacitance in the catalog is desired in determining the specified passband characteristics.

GROUP DELAY TIME CHARACTERISTICS

Perhaps one of the most important characteristics of a transmitting element is to transmit a signal with the lowest possible distortion level. This distortion occurs when the phase shift of a signal which passes through a certain transmitting path is non-linear with respect to the frequency. For convenience, the group delay time (GDT) characteristic is used for the purpose of expressing non-linearity.

It is important to note the relationship between the amplitude and the GDT characteristics when using group delay time terminology. This relationship differs depending upon the filter characteristics. For example, in the Butterworth type, which has a relatively flat top, the passband is flat while the GDT characteristic is extremely curved, as shown in Fig. 434-16. On the other hand, a Gaussian type, is curved in the passband, while the GDT characteristic is flat. With the flat GDT characteristics, the Gaussian type has excellent distortion characteristics.

Since the amplitude characteristics for the Butterworth type is flat in the passband the bandwidth does not change even at a low input level. With the amplitude characteristic for the Gaussian type being curved in the passband, the bandwidth becomes narrow at a low input level and the sensitivity is poor. Therefore, it should be noted that the Gaussian type has a desirable distortion factor while the Butterworth type has the desirable sensitivity.



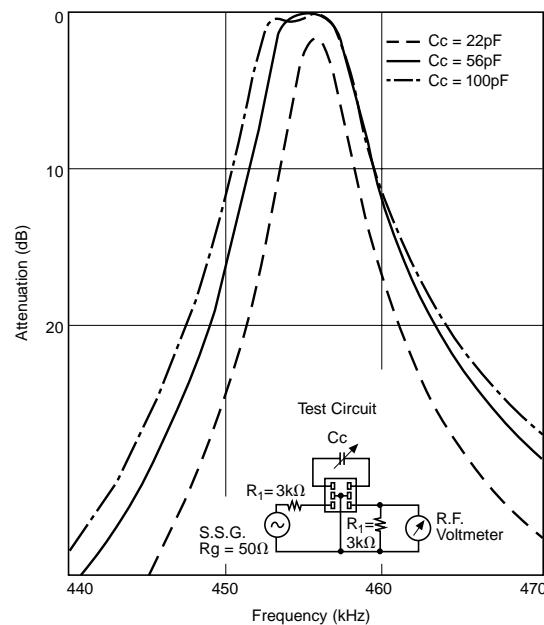


Fig. 434-15
Model SFZ455A Ceramic Filter
Coupling Capacitance vs. Passband
Characteristics



(A) Butterworth Characteristic



(B) Gaussian Characteristic

Fig. 434-16
Relationship Between Amplitude
And GDT Characteristics

PIEZO FILTERS

MULTI-ELEMENT FILTERS,
RESIN MOLDED, HIGHLY SELECTIVE

muRata
Innovator in Electronics

CFWS 455kHz



The CFWS 455 line of ceramic filters are 6-element devices connected in ladder form. These compact, highly selective filters are recommended for use in applications ranging from two-way radio to auxiliary filters in high class transceivers. (Also available in 450kHz version.)

SPECIFICATIONS

Part Number	Nominal Center Frequency (kHz)	6dB Bandwidth (kHz) min.	40dB Bandwidth (kHz) max.	Attenuation 455±100kHz (dB) min.	Ripple (dB) max. kHz	Insertion Loss (dB) max.	Input/Output Impedance (Ohms)
★CFWS455B	455	±15	±30	35	3 (455 ± 10)	4	1500
★CFWS455C	455	±12.5	±24	35	3 (455 ± 8)	4	1500
★CFWS455D	455	±10	±20	35	3 (455 ± 7)	4	1500
★CFWS455E	455	±7.5	±15	35	3 (455 ± 5.0)	6	1500
★CFWS455F	455	±6	±12.5	35	3 (455 ± 4)	6	2000
★CFWS455G	455	±4.5	±10	35	2 (455 ± 3)	6	2000
CFWS455HT	455	±3	±9	60	2 (455 ± 2)	6	2000
CFWS455IT	455	±2	±7.5	60	2 (455 ± 1.5)	6	2000

DIMENSIONS: mm	CIRCUIT	CHARACTERISTICS

*Available as standard through authorized Murata Electronics Distributors.

*Note: For safety purposes, connect the output of filters to the IF amplifier through a DC blocking capacitor. Avoid applying a direct current to the output of ceramic filters.


CFUM/CFWM 455kHz




The CFUM 455 and CFWM 455 lines of ceramic filters are miniaturized versions of the CFU/CFWS lines. These ultra-miniature versions consume approximately 40% less volume while still offering the same high performance filter characteristics available with the CFU/CFWS lines.
(Also available in 450kHz version.)


SPECIFICATIONS

Part Number	Nominal Center Frequency (kHz)	6dB Bandwidth (kHz) min.	40dB Bandwidth (kHz) max.	Attenuation 455±100kHz (dB) min.	Insertion Loss (dB) max.	Input/Output Impedance (Ohms)
★CFUM455B	455	±15	±30	27	4	1500
★CFUM455C	455	±12.5	±24	27	4	1500
★CFUM455D	455	±10	±20	27	4	1500
★CFUM455E	455	±7.5	±15	27	6	1500
★CFUM455F	455	±6	±12.5	27	6	2000
★CFUM455G	455	±4.5	±10	25	6	2000
★CFUM455H	455	±3	±9	35	6	2000
★CFUM455I	455	±2	±7.5	35	7	2000

DIMENSIONS: mm


CIRCUIT



Rg+R₁=R₂=Input/Output Impedance
1=INPUT
3,4=GND
2=OUTPUT


CHARACTERISTICS


CFUM 455B, CFUM 455C, CFUM 455D, CFUM 455E, CFUM 455H, CFUM 455I


SPECIFICATIONS

Part Number	Nominal Center Frequency (kHz)	6dB Bandwidth (kHz) min.	40dB Bandwidth (kHz) max.	Attenuation 455±100kHz (dB) min.	Insertion Loss (dB) max.	Input/Output Impedance (Ohms)
★CFWM455B	455	±15	±30	35	4	1500
★CFWM455C	455	±12.5	±24	35	4	1500
★CFWM455D	455	±10	±20	35	4	1500
★CFWM455E	455	±7.5	±15	35	6	1500
★CFWM455F	455	±6	±12.5	35	6	2000
★CFWM455G	455	±4.5	±10	35	6	2000
★CFWM455H	455	±3	±9	55	6	2000
★CFWM455I	455	±2	±7.5	55	7	2000

DIMENSIONS: mm


CIRCUIT


Rg+R₁=R₂=Input/Output Impedance
1=INPUT
3,4,5=GND
2=OUTPUT

CHARACTERISTICS


CFWM 455B, CFWM 455C, CFWM 455D, CFWM 455E, CFWM 455H, CFWM 455I

* Available as standard through authorized Murata Electronics Distributors.


*Note: For safety purposes, connect the output of filters to the IF amplifier through a DC blocking capacitor. Avoid applying a direct current to the output of ceramic filters.

PIEZO FILTERS

MULTI-ELEMENT, ULTRA-MINIATURE,
RESIN MOLDED, HIGHLY SELECTIVE

muRata
Innovator in Electronics

CFVM/CFZM 455kHz

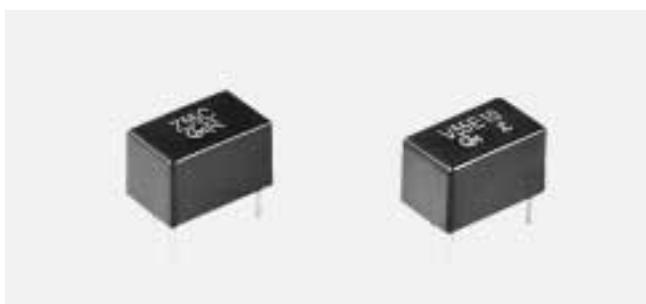


The CFVM 455 line of ceramic filters are 7-element devices connected in ladder form while the CFZM 455 line of filters contain 9-elements. These highly selective filters offer improved stopband attenuation and are recommended for use in a variety of applications. (Also available in 450kHz version.)


SPECIFICATIONS

Part Number	Nominal Center Frequency (kHz)	3dB Bandwidth (kHz) min.	6dB Bandwidth (kHz) min.	Ripple (dB) max.	60dB Bandwidth (kHz) max.	Attenuation (dB) min.	Spurious Response (dB) min.	Insertion Loss (dB) max.	Input/Output Impedance (Ohms)
CFVM455B	455	± 10	± 15	3	± 25	50	25	4	1000
CFVM455C	455	± 9	± 13	3	± 23	50	25	4	1000
CFVM455D	455	± 7	± 10	3	± 20	50	25	4	1500
CFVM455E	455	± 5.5	± 8	3	± 16	50	25	6	1500
CFVM455E10	455	± 5.0	± 7.0	3	± 12.5	50	25	6	1500
CFVM455F	455	± 4.2	± 6	3	± 12	50	25	6	1500
CFVM455G	455	—	± 4	3	± 10	50	25	6	1500
CFVM455H	455	—	± 3	3	± 7.5	50	25	6	1500


DIMENSIONS: mm



CIRCUIT




CHARACTERISTICS




SPECIFICATIONS

Part Number	Nominal Center Frequency (kHz)	3dB Bandwidth (kHz) min.	6dB Bandwidth (kHz) min.	Ripple (dB) max.	70dB Bandwidth (kHz) max.	Attenuation (dB) min.	Spurious Response (dB) min.	Insertion Loss (dB) max.	Input/Output Impedance (Ohms)
CFZM455B	455	± 10	± 15	3	± 25	70	40	4	1000
CFZM455C	455	± 9	± 13	3	± 23	70	40	4	1000
CFZM455D	455	± 7	± 10	3	± 20	70	40	4	1500
CFZM455E	455	± 5.5	± 8	3	± 16	70	40	6	1500
CFZM455E10	455	± 5.0	± 7.5	3	± 12.5	70	40	6	1500
CFZM455F	455	± 4.2	± 6	3	± 12	70	50	6	1500
CFZM455G	455	—	± 4	3	± 10	70	50	6	1500
CFZM455H	455	—	± 3	3	± 7.5	70	50	7	1500


DIMENSIONS: mm



CIRCUIT



CHARACTERISTICS



*Note: For safety purposes, connect the output of filters to the IF amplifier through a DC blocking capacitor. Avoid applying a direct current to the output of ceramic filters.

PIEZO FILTERS

MULTI-ELEMENT HIGH PERFORMANCE

muRata
Innovator in Electronics

CFM/CFJ/CFR/CFS/CFL 455kHz



The following lines of filters are high performance devices that achieve ultimate stopband attenuation through the use of multiple piezoelectric elements connected in ladder form. A few of the recommended applications for these filters include high class receivers. SSB communications equipment, pocket pagers and mobile radios.


CFM 455 9 Ceramic Elements
CFJ 455K 11 Ceramic Elements
CFR 455 11 Elements Filters
CFS 455 15 Element Filters
CFL 455 9 Element Filters (GDT Improved)

(NOT available in 450kHz.)

SPECIFICATIONS

Part Number	Nominal Center Frequency (kHz)	3dB Bandwidth (kHz) min.	6dB Bandwidth (kHz) min.	Ripple (dB) max.	Bandwidth		Attenuation 455±100kHz (dB) min.	Spurious 0.1~1MHz (dB) min.	Insertion Loss (dB) max.	Input/Output Impedance (Ohms)	GroupDelay Time Dev. sec. max. (kHz)
					(kHz) max.	At (dB)					
CFM455A	455	±13	±17.5	3	±30	60	50	30	3	1000	
CFM455B	455	±10	±15	3	±25		50	30	3	1000	
CFM455C	455	±9	±13	3	±23		50	30	3	1000	
CFM455D	455	±7	±10	3	±20		50	30	3	1500	
CFM455E	455	±5.5	±8	3	±16		45	30	5	1500	
CFM455F	455	±4.2	±6	3	±12		45	30	6	2000	
CFM455G	455	—	±4	3	±10		45	30	6	2000	
CFM455H	455	—	±3	3	±7.5		45	30	6	2000	
CFM455I	455	—	±2	3	±5		45	30	7	2000	
CFM455J	455	—	±1.5	3	±4.5		60	40	4	1000	
CFR455A	455	±13	±17.5	3	±30	70	60	40	4	1000	
CFR455B	455	±10	±15	3	±25		60	40	4	1000	
CFR455C	455	±9	±13	3	±23		60	40	4	1000	
CFR455D	455	±7	±10	3	±20		60	40	4	1500	
CFR455E	455	±5.5	±8	3	±16		55	40	6	1500	
CFR455F	455	±4.2	±6	3	±12		55	40	6	2000	
CFR455G	455	—	±4	3	±10		55	40	6	2000	
CFR455H	455	—	±3	3	±7.5		55	40	7	2000	
CFR455I	455	—	±2	3	±5		55	40	8	2000	
CFR455J	455	—	±1.5	3	±4.5		55	40	8	2000	
CFJ455K5	455	—	2.4 (Total)	2	4.5 (Total)	60	—	60 _{40 at 600 ~ 700kHz}	6	2000	
CFJ455K14	455	—	±1.1 ~ ±1.3	2	4.5 (Total)		—	60 _{40 at 600 ~ 700kHz}	7	2000	
CFJ455K8	455	—	1.0 (Total)	1.5	3.0 (Total)		60	—	8	2000	
CFS455A	455	±13	±17.5	3	±30	80	70	50	4	1500	
CFS455B	455	±10	±15	3	±25		70	50	4	1500	
CFS455C	455	±9	±13	3	±23		70	50	4	1500	
CFS455D	455	±7	±10	3	±20		70	50	4	1500	
CFS455E	455	±5.5	±8	3	±15		70	50	6	1500	
CFS455F	455	±4.2	±6	3	±12		70	50	6	2000	
CFS455G	455	—	±4	3	±9		70	50	6	2000	
CFS455H	455	—	±3	3	±7.5		70	50	7	2000	
CFS455I	455	—	±2	3	±5		70	50	8	2000	
CFS455J	455	—	±1.5	3	±4.5		60	50	8	2000	
CFL455BG5	455	±10.5	±13.5	0.5	±27.5	60	60	30	10	1000	25μ(455±10.5)
CFL455CG1	455	±9.5	±12.0	0.5	±25.5		60	30	10	1000	35μ(455±9.5)
CFL455DG2	455	±7.0	±9.0	0.5	±21.0		60	30	11	1000	35μ(455±7)
CFL455EG1	455	±5.0	±7.0	0.5	±18		60	30	13	1500	30μ(455±5)

DIMENSIONS: mm

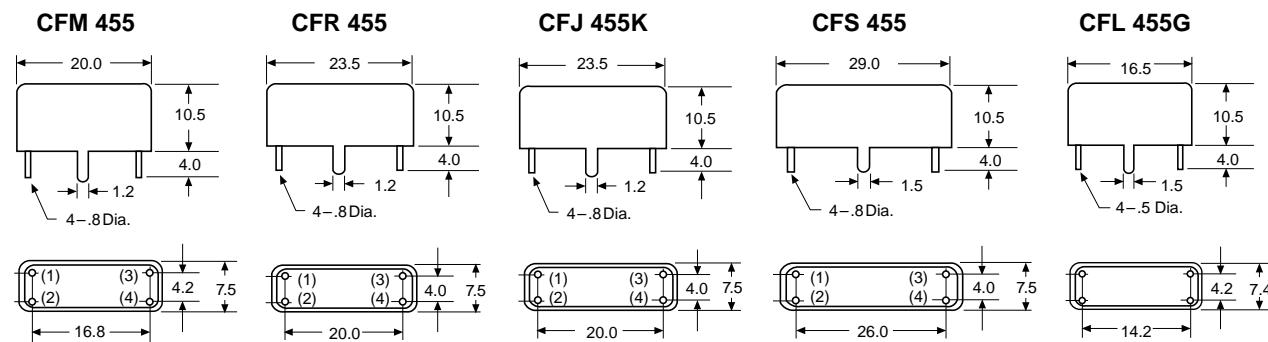

*Note: For safety purposes, connect the output of filters to the IF amplifier through a DC blocking capacitor. Avoid applying a direct current to the output of ceramic filters.

PIEZO FILTERS

MULTI-ELEMENT, RESIN MOLDED,
G.D.T. FLAT TYPE

muRata
Innovator in Electronics

CFWS□Y 455kHz




The CFWS□Y lines of ceramic filters are 6-element devices connected in ladder form. These highly selective filters are designed to address the G.D.T. characteristics required in digital communications. The excellent G.D.T. characteristics allow these filters to be utilized in areas such as the mobile cellular markets as well as a variety of stereo applications. (Also available in 450kHz version.)

SPECIFICATIONS


CFWS□Y 455kHz

Part Number	6dB Bandwidth (kHz) min.	50dB Bandwidth (kHz) min.	Insertion Loss (dB) max.	Attenuation at 455 ± 100kHz (dB) min.	Group Delay Time sec. max. (kHz)	Input/Output Impedance (Ohms)
CFWS455BY	±15.0	±35	6.0	35	30μ (455 ± 10)	1.5k
CFWS455CY	±12.5	±30	7.0	35	30μ (455 ± 8.0)	1.5k
CFWS455DY	±10.0	±25	8.0	35	30μ (455 ± 7.0)	1.5k
CFWS455EY	±7.5	±20	9.0	35	30μ (455 ± 5.0)	1.5k
CFWS455FY	±6.0	±17.5	10.0	35	40μ (455 ± 4.0)	2.0k
CFWS455GY	±4.5	±15	13.0	35	40μ (455 ± 3.0)	2.0k


DIMENSIONS: mm

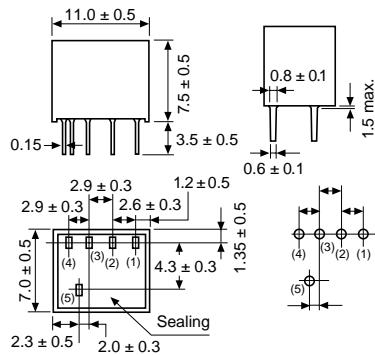

CIRCUIT

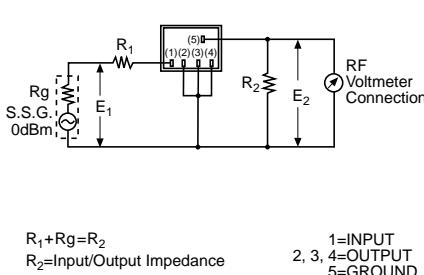

TYPICAL CHARACTERISTICS

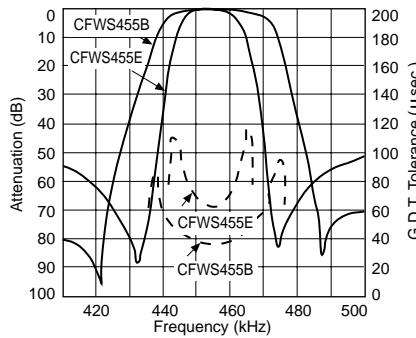

PIEZO FILTERS

MULTI-ELEMENT, ULTRA MINIATURE G.D.T. FLAT TYPE

mRata
Innovator in Electronics



CFUM□Y/CFWM□Y 455kHz

The CFUM□Y/CFWM□Y lines of ceramic filters are miniaturized versions of the CFUS□Y/CFWS□Y lines. These ultra-miniature versions consume approximately 40% less volume while still offering the same excellent G.D.T. characteristics as the CFUS□Y/CFWS□Y lines. This reduction in size makes these devices ideal for compact communication applications such as mobile telephones. (Also available in 450kHz version.)

SPECIFICATIONS


CFUM□Y 455kHz

Part Number	6dB Bandwidth (kHz) min.	40dB Bandwidth (kHz) max.	Attenuation at 455 ± 100kHz (dB) min.	Insertion Loss (dB) max.	Group Delay Time sec. max. (kHz)	Input/Output Impedance (Ohms)
CFUM455BY	±15	±35	23	5	15μ (455 ± 10.0)	1500
CFUM455CY	±12.5	±30	23	6	15μ (455 ± 8.0)	1500
CFUM455DY	±10	±25	23	7	20μ (455 ± 7.0)	1500
CFUM455EY	±7.5	±20	23	8	20μ (455 ± 5.0)	1500
CFUM455FY	±6.0	±17.5	23	9	20μ (455 ± 4.0)	2000
CFUM455GY	±4.5	±15	23	10	20μ (455 ± 3.0)	2000


• CFUM455□Y is a miniaturized 4-element version of the conventional CFUS455□Y.

• Note: For safety purposes, connect the output of filters to the IF amplifier through a DC blocking capacitor. Avoid applying a direct current to the output of ceramic filters.


DIMENSIONS: mm

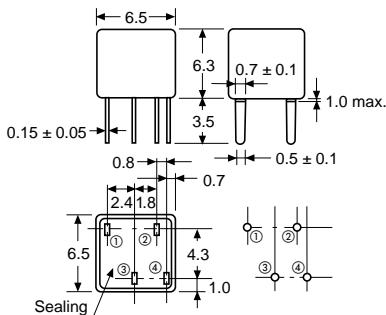

CIRCUIT

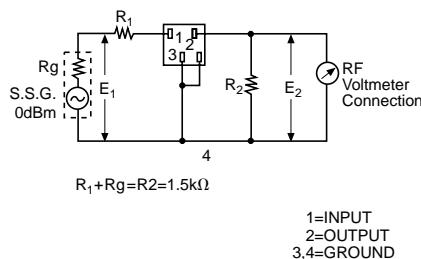

CHARACTERISTICS

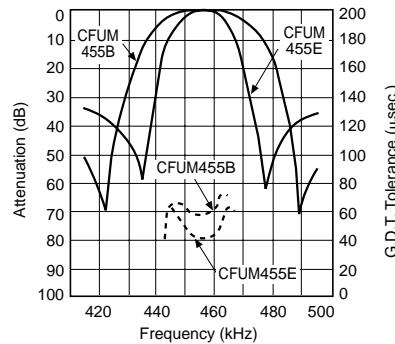

SPECIFICATIONS


CFWM□Y 455kHz

Part Number	6dB Bandwidth (kHz) min.	50dB Bandwidth (kHz) max.	Attenuation at 455 ± 100kHz (dB) min.	Insertion Loss (dB) max.	Group Delay Time sec. max. (kHz)	Input/Output Impedance (Ohms)
CFWM455BY	±15	±35	35	6	30μ (455 ± 10.0)	1500
CFWM455CY	±12.5	±30	35	7	30μ (455 ± 8.0)	1500
CFWM455DY	±10	±25	35	8	30μ (455 ± 7.0)	1500
CFWM455EY	±7.5	±20	35	9	30μ (455 ± 5.0)	1500
CFWM455FY	±6.0	±17.5	35	10	40μ (455 ± 4.0)	2000
CFWM455GY	±4.5	±15	35	13	40μ (455 ± 3.0)	2000


• CFWM455□Y is a miniaturized 4-element version of the conventional CFWS455□Y.

• Note: For safety purposes, connect the output of filters to the IF amplifier through a DC blocking capacitor. Avoid applying a direct current to the output of ceramic filters.


DIMENSIONS: mm

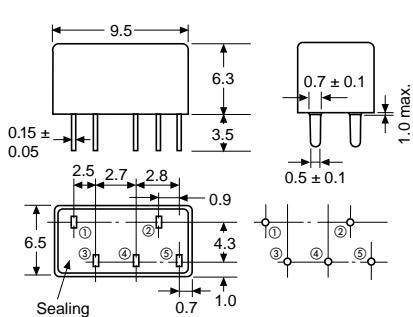

CIRCUIT

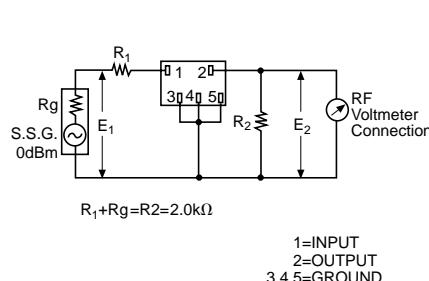

CHARACTERISTICS

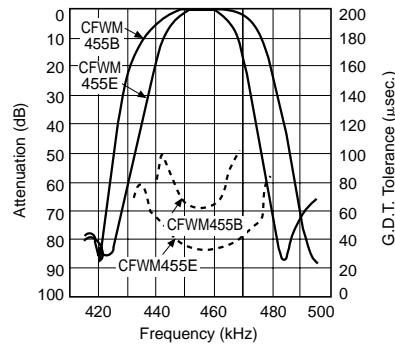

PIEZO FILTERS

SURFACE MOUNTED CHIP PIEZOELECTRIC CERAMICS FILTERS
FOR MOBILE COMMUNICATIONS APPLICATIONS

NEW

muRata
Innovator in Electronics

CFUXC 450kHz





Introducing Murata's newest surface mount kHz filter, the CFUXC Series. This is a 4-element filter that uses new technology developed by Murata to achieve the world's smallest and lightest surface mount kHz filter. This 2mm high filter offers the attenuation of a 6-element filter and a good G.D.T. in a smaller package.

SPECIFICATIONS

Part Number	Nominal Center Frequency (kHz)	3dB Bandwidth (kHz min.)	6dB Bandwidth (kHz min.)	50dB Bandwidth (kHz min.)	Spurious Response Attenuation (dB min.)	Insertion Loss (dB max.)	Ripple (dB max.)	G.D.T. Deviation (μsec. max.)	Input/Output Impedance (Ohms)
CFUXC450A100H-TC01	450	—	±17.5	±55	40	5	0.5	15	2k
CFUXC450B100H-TC01	450	—	±15	±50	40	6	0.5	15	2k
CFUXC450C100H-TC01	450	±9 ~ ±12	—	±35	40	6	0.5	27	2k


DIMENSIONS: mm

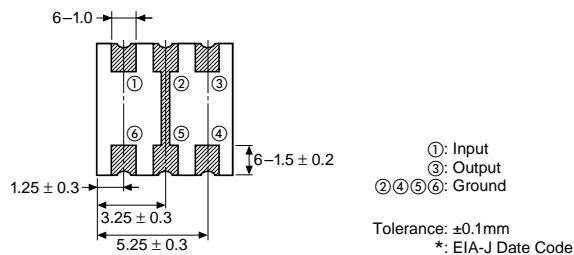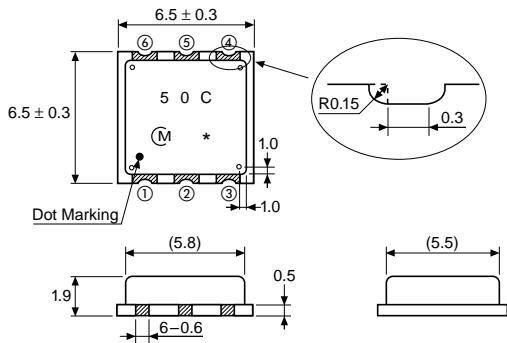

①: Input
③: Output
②④⑤⑥: Ground

Tolerance: ±0.1mm
*: EIA-J Date Code

TEST CIRCUIT

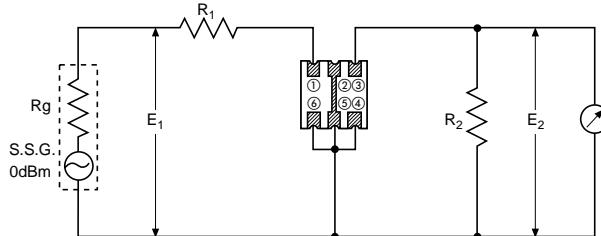


$$R_1 + R_g = R_2 = 2.0\text{k}\Omega$$

$$\text{Insertion Loss (dB)} = 20 \cdot \log \left(\frac{E_1}{E_2} \right) - 6 \text{ (dB)}$$


$$= 20 \cdot \log E_1 - 20 \cdot \log E_2 - 6 \text{ (dB)}$$

E₁: S.S.G. high impedance output

TAPING DIMENSIONS: mm

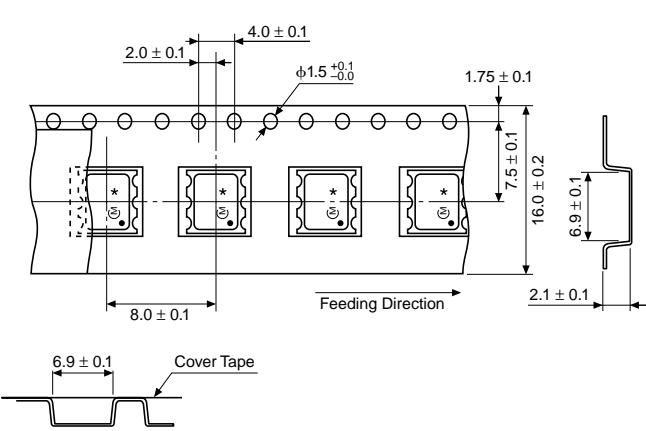

REEL DIMENSIONS: mm

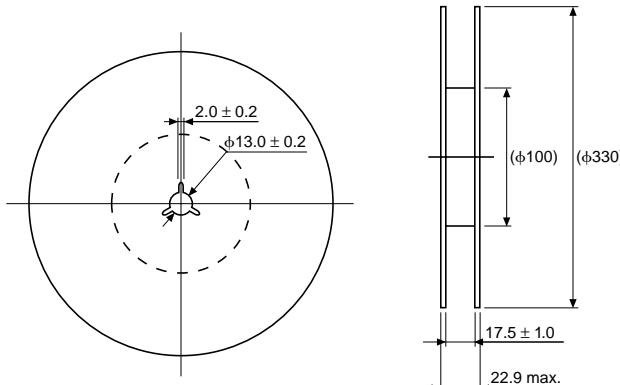


*Note: For safety purposes, connect the output of filters to the IF amplifier through a DC blocking capacitor. Avoid applying a direct current to the output of ceramic filters.

PIEZO FILTERS

SURFACE MOUNTED CHIP PIEZOELECTRIC CERAMICS FILTERS FOR AM APPLICATIONS

muRata
Innovator in Electronics

CFUCG, SFGCG, SFPC, CFWC 455kHz

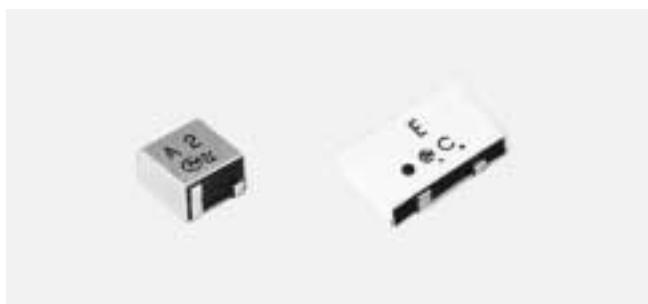


Along with the development of the AM chip filter, IF filters for AM radios have also been made smaller, thinner and in a chip configuration for surface mounting. This is one more example of Murata Electronics' leadership in converting conventional electronic components to chip technology.

PRELIMINARY SPECIFICATIONS


SMD 455kHz

Part Number	Center Frequency		Bandwidth (Total)			Ripple (max.)		*Insertion Loss (max.) dB	Stop Band Atten. (min.) at $\pm 100\text{kHz}$ dB	Group Delay (max.)		Source And Load Impedance (Ohms)
	Nom. (kHz)	Tol. \pm (kHz)	3dB (min.) (kHz)	6dB (min.) (kHz)	40dB (max.) (kHz)	dB	Point of Measure			μs	Point of Measure	
CFUCG455E-TC	455	1.5	—	15	30	1.5	—	6	27	—	—	1500
CFUCG455F-TC	455	1.5	—	12	25	1.5	—	6	27	—	—	1500
CFUCG455G-TC	455	1	—	9	20	1.5	—	6	25	—	—	1500
CFUCG455FX-TC	455	1.5	—	12	30	1	—	6	27	25	—	1500
CFUCG455GX-TC	455	1	—	9	25	1	—	6	25	25	—	1500
CFUCG455HX-TC	455	1	—	6	20	1	—	7	25	25	—	1500
SFGCG455AX-TC	455	2.0	—	35	80	1	—	4	25	15	—	1000
SFGCG455BX-TC	455	1.5	—	30	70	1	—	5	25	15	—	1000
SFGCG455CX-TC	455	1.5	—	25	60	1	—	6	25	15	—	1000
SFGCG455DX-TC	455	1	—	20	50	1	—	7	23	20	—	1500
SFGCG455EX-TC	455	1	—	15	40	1	—	8	23	20	—	1500
SFPC455E-TC01	455	1.5	—	15	30	—	—	6	27	—	—	1500
SFPC455F-TC01	455	1.5	—	12	25	—	—	6	27	—	—	1500
SFPC455G-TC01	455	1	—	9	20	—	—	6	25	—	—	1500
SFPC455H-TC01	455	1	—	6	18	—	—	6	25	—	—	2000
CFWC455CZ-TC	455	—	21 to 26	—	—	0.5	± 10.5	6	50	27	± 10.5	1000
CFWC455CZ2-TC	455	—	18 to 22	—	—	0.5	± 9	6	50	27	± 9	1000

DIMENSIONS: mm
CFUCG/SFGCG

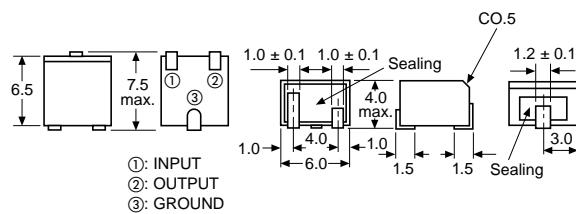


SFPC

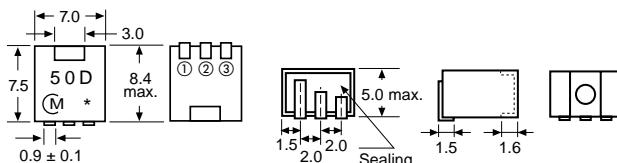


SPECIFICATIONS

CFWC

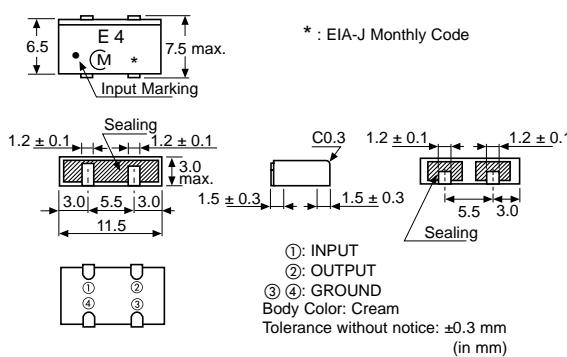

TEST CIRCUIT

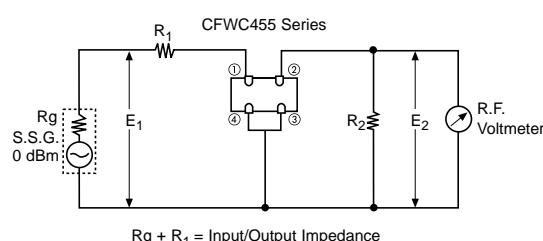


Connection
 (1): INPUT
 (2): OUTPUT
 (3) (4): GND


*Note: For safety purposes, connect the output of filters to the IF amplifier through a DC blocking capacitor. Avoid applying a direct current to the output of ceramic filters.

CHARACTERISTICS (TYP.)

SFGCG455BX




CFWC455E4




PAD DIMENSIONS: mm


SFPC



SFGCG/CFUCG




CFWC




PLASTIC TAPE DIMENSIONS: mm


SFPC - TC01

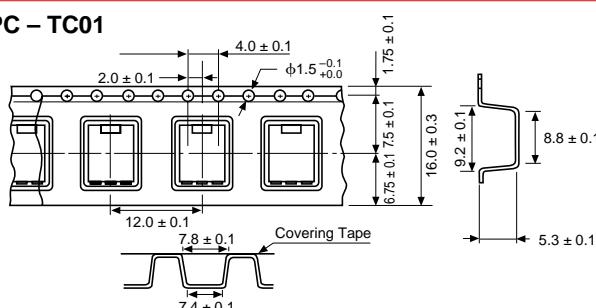


REEL

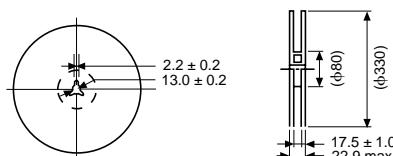


SFGCG/CFUCG - TC

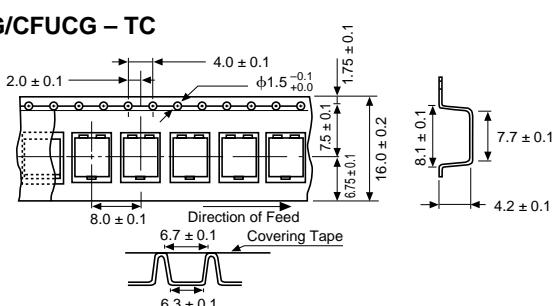


REEL

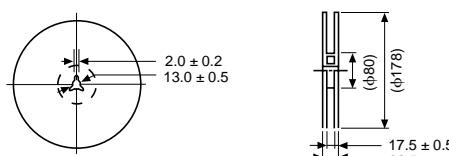

CFWC - TC

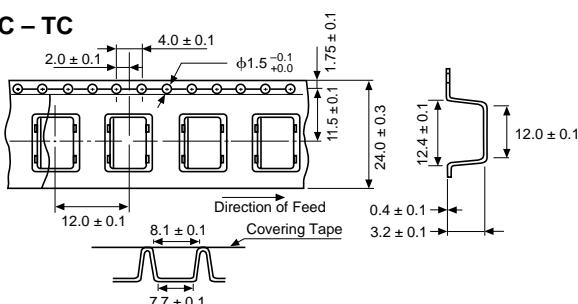


REEL

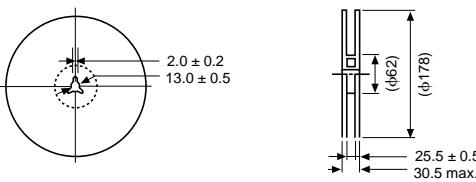

PIEZO FILTERS

HIGH PERFORMANCE CERAMIC DISCRIMINATORS FOR MOBILE COMMUNICATION EQUIPMENT CDB/CDBC/CDBM 455kHz

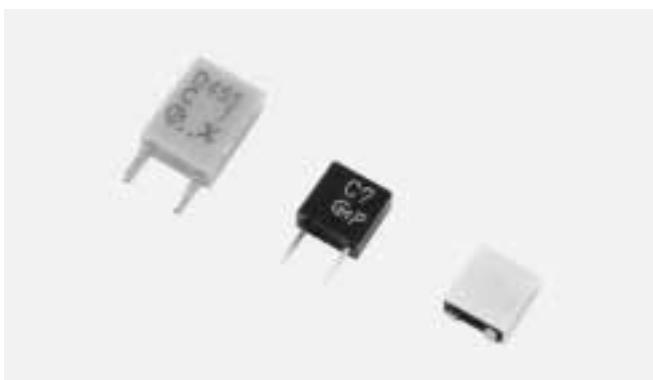

Ceramic discriminator consists of wide band piezoelectric resonator. It is ideal for mobile communication equipment due to its small size and light weight. Standard line includes products for a wide range of applications, from cordless telephones to cellular telephones, making non-adjustment and shrinking of the detection circuit possible.

FEATURES

- Small in size and light weight
- Realize non-adjustment in detection circuit
- High sensitivity and stability
- Wide range of standard products are available for various ICs
- Operating temperature range: -20°C to +80°C
Storage temperature range: -40°C to +85°C

RECOVERED AUDIO CURVE SPECIFICATIONS

CDB/CDBC/CDBM 455kHz

Part Number/ Characteristics	Recovered Audio		Distortion		IC	Application
	3dB Bandwidth (from 544kHz) min.	Output (at 455kHz)	(at 455kHz) max.	within 455 ± 8kHz		
CDB455C7	±4.0	340 ± 60mV	2.5%	—	MC3357	Cordless Telephone, Communications Equipment
CDBM455C7	±4.0	340 ± 60mV	3.0%	—		
CDBC455CX7	±4.0	350 ± 60mV	3.0%	—		
CDB455C9	±5.0	100mV min.	1.5%	—	NE604N	Cordless Telephone, Cellular Phone, Communications Equipment
CDBM455C9	±5.0	100mV min.	1.5%	—		
CDBC455CX9	±4.0	120 ± 40mV	1.5%	—		
CDB455CL9	±15.0	70 ± 20mV	1.5%	3.5% max.		
CDBM455CL9	±15.0	70 ± 20mV	1.5%	3.5% max.		
CDB455C13A	±4.0	350 ± 50mV	3.0%	—	CXA1003BM	Cellular Phone, Communications Equipment
CDBM455C13A	±4.0	350 ± 50mV	3.0%	—		
CDBC455CX13	±4.0	330 ± 50mV	4.0%	—		
CDB455CL13	±15.0	110 ± 30mV	1.5%	5.0% max.		
CDBM455CL13	±15.0	110 ± 30mV	1.5%	5.0% max.		
CDBC455CLX13	±13.0	120 ± 30mV	1.5%	5.0% max.	MC3372	Cellular Phone, Cordless Telephone, Communications Equipment
CDB455C16	±4.0	185 ± 40mV	2.0%	—		
CDBM455C16	±4.0	185 ± 40mV	2.0%	—		
CDBC455CX16	±4.0	175 ± 40mV	2.0%	—		
CDBM455C18	±3.0	180 ± 40mV	2.0%	—	MC3371	Cordless Telephone, Communications Equipment
CDB455C21	±4.0	55 ± 20mV	2.0%	—	TA31132	Cordless Telephone, Cellular Phone, Communications Equipment
CDBM455C21	±4.0	55 ± 20mV	2.0%	—		
CDBC455CX21	±4.0	55 ± 20mV	2.0%	—		
CDB455CL21	±13.0	65 ± 20mV	2.5%	5.0% max.		
CDBM455CL21	±13.0	65 ± 20mV	2.5%	5.0% max.		
CDBC455CLX21	±11.0	75 ± 25mV	2.5%	5.0% max.		
CDB455C24	±4.0	100 ± 40mV	2.0%	—	TA31136	Cordless Telephone, Communications Equipment
CDBM455C24	±4.0	100 ± 40mV	2.0%	—		
CDBC455CX24	±4.0	100 ± 40mV	2.0%	—		
CDB455C27	±4.0	100 ± 40mV	2.0%	—		
CDBM455C27	±4.0	100 ± 40mV	2.0%	—	TK10487	Cordless Telephone, Communications Equipment
CDBC455CX27	±4.0	90 ± 30mV	2.0%	—		
CDB455C28	±4.0	40 ± 20mV	3.0%	—		
CDBM455C28	±4.0	40 ± 20mV	3.0%	—	TA31142	Pager
CDBC455CX28	±4.0	40 ± 20mV	3.0%	—		

PIEZO FILTERS

HIGH PERFORMANCE CERAMIC DISCRIMINATORS
FOR MOBILE COMMUNICATION EQUIPMENT CDB/CDBC/CDBM 455kHz



RECOVERED AUDIO CURVE SPECIFICATIONS

CDB/CDBC/CDBM 455kHz

Part Number/ Characteristics	Recovered Audio		Distortion		IC	Application
	3dB Bandwidth (from 455kHz) min.	Output (at 455kHz)	(at 455kHz) max.	within 455 ± 8kHz		
CDB455C29	±4.0	125 ± 30mV	2.5%	—	NE605	Cordless Telephone, Communications Equipment
CDBM455C29	±4.0	125 ± 30mV	2.5%	—		
CDBC455CX29	±4.0	100 ± 30mV	2.5%	—		
CDB455C30	±4.0	90 ± 30mV	2.0%	—	TK14501	Telephone, Communications Equipment
CDBM455C30	±4.0	90 ± 30mV	2.0%	—		
CDBC455CX30	±4.0	80 ± 20mV	2.0%	—		
CDB455C32	±4.0	40 ± 20mV	3.0%	—	TA31143	Pager
CDBM455C32	±4.0	40 ± 20mV	3.0%	—		
CDBC455CX32	±4.0	40 ± 20mV	3.0%	—		
CDB455C34	±4.0	65 ± 20mV	2.5%	—	MC13136	Cordless Telephone, Communications Equipment
CDBM455C34	±4.0	65 ± 20mV	2.5%	—		
CDB455C35	±4.0	100 ± 40mV	2.5%	—		
CDBM455C35	±4.0	100 ± 40mV	2.5%	—	TK10930	Cordless Telephone, Communications Equipment
CDBC455CX35	±4.0	100 ± 40mV	2.5%	—		
CDBM455C36	±3.5	100 ± 25mV	3.5%	—		
CDBC455CLX36	±13.0	90 ± 30mV	2.5%	5.0% max.	NE(SA)606, NE(SA)616	Cordless Telephone, Cellular Phone
CDBM455C39	±4.0	85 ± 20mV	2.5%	—		
CDBC455CLX39	±11.0	130 ± 20mV	2.5%	7.0% max.	NE(SA)607/617	Cordless Telephone
CDBM455C40	±4.0	40 ± 20mV	3.0%	—	TA31145	Pager
CDBC455CX40	±4.0	40 ± 20mV	3.5%	—		
CDB455C42	±4.0	40 ± 15mV	3.0%	—		
CDBM455C42	±4.0	40 ± 15mV	3.0%	—	TK14590, TK14591	Pager
CDBM455C49	±4.0	45 ± 10mV	3.0%	—		
CDBC455CX49	±4.0	45 ± 10mV	3.0%	—	MC3361	Cordless Telephone
CDBM455C50	±4.0	64 ± 6.4mV	4.0%	—		
CDBC455CX50	±4.0	64 ± 6.4mV	4.0%	—		
CDBC455C52	±3.0	65 ± 25mV	3.0%	—	SA625	Communications Equipment
CDBC455C55	±3.0	40 ± 15mV	3.0%	—	SA608D	Communications Equipment
CDBC455C56	±4.0	100 ± 20mV	2.0%	—	BA4116FV	Communications Equipment

PIEZO FILTERS

IMPEDANCE CURVE SPECIFICATIONS

CDB/CDBC/CDBM 455kHz

Part Number/ Characteristics	Resonant Frequency (Fr)	Antiresonant Frequency (Fa)	ΔF (Fa-Fr)	Resonant Resistance (R1)	Capacitance (C)	IC	Application
CDBM455C2	447 ± 1.5kHz	(Z = 2.05kΩ)	463 ± 1.5kHz	(Z = 10.0kΩ)	140pF ± 20%	TA8104F	Pager
CDBC455CX2	447 ± 1.5kHz	(Z = 0.80kΩ)	463 ± 1.5kHz	(Z = 3.65kΩ)	280pF ± 20%		
CDB455C3	—	455 ± 1.5kHz	48 ± 5.0kHz	70Ω max.	600pF ± 20%	CXA1184M	Pager
CDBM455C3	—	455 ± 1.5kHz	46 ± 5.0kHz	70Ω max.	550pF ± 20%		
CDBM455C4	—	470 ± 1.0kHz	43 ± 2.0kHz	300Ω max.	140pF ± 20%	LA8610	Pager
CDB455C10	429 ± 2kHz	—	51 ± 5.0kHz	70Ω max.	580pF ± 20%	TA8103F	Cordless Telephone
CDBM455C10	429 ± 2kHz	—	51 ± 5.0kHz	70Ω max.	580pF ± 20%		
CDBM455C15	—	463.5 ± 1kHz	43 ± 2.0kHz	300Ω max.	140pF ± 20%	CXA1183M	Cordless Telephone
CDBM455C25	—	465 ± 1.5kHz	45 ± 4.0kHz	300Ω max.	135pF ± 20%	CXA1484	Pager
CDBM455C31	447 ± 1.5kHz	(Z = 2.05kΩ)	463 ± 1.5kHz	(Z = 10.0kΩ)	140pF ± 20%	TA31141	Pager
CDBC455CX31	447 ± 1.5kHz	(Z = 0.80kΩ)	463 ± 1.5kHz	(Z = 3.65kΩ)	280pF ± 20%		
CDBM455C33	—	465 ± 1.5kHz	45 ± 4.0kHz	300Ω max.	135pF ± 20%	CXA1474	Pager


PIEZO FILTERS

HIGH PERFORMANCE CERAMIC DISCRIMINATORS FOR MOBILE COMMUNICATION EQUIPMENT CDB/CDBC/CDBM 455kHz

muRata
Innovator in Electronics


DIMENSIONS: mm

CDB455C□/CDB455CL□

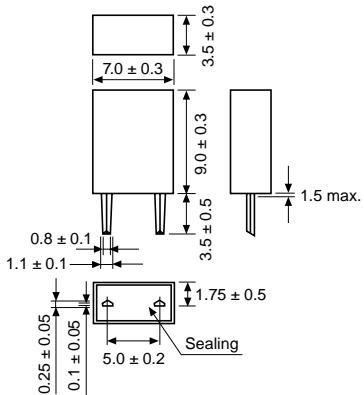


Applicable Part Number: All

CDBM455C□/CDBM455CL□

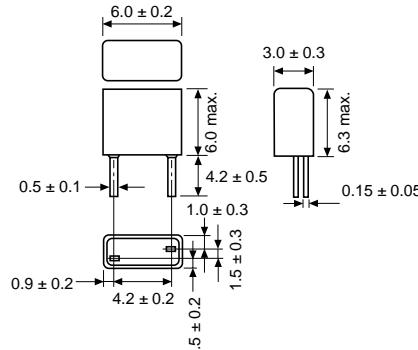


Applicable Part Number: 3, 7, 9, 10, 13, 21, 24, 27, 28, 29, 30, 32, 34,
35, 40, 42, 47, 49, 50

CDBM455C□

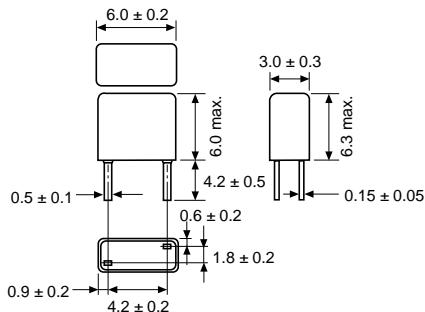

Applicable Part Number: 2, 4, 15, 16, 18, 25, 31, 33, 36, 39


CDBC455CX□/CDBC455CLX□

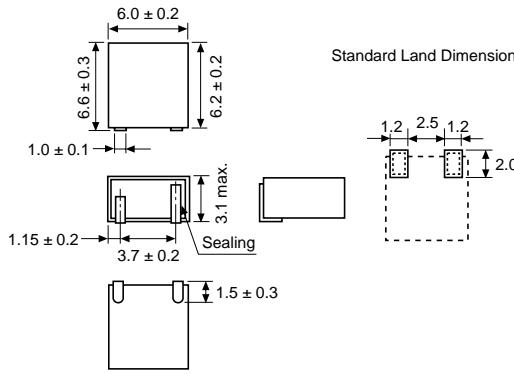

Applicable Part Number: All


PLASTIC TAPE DIMENSIONS: mm


CDBC455C□ – TC

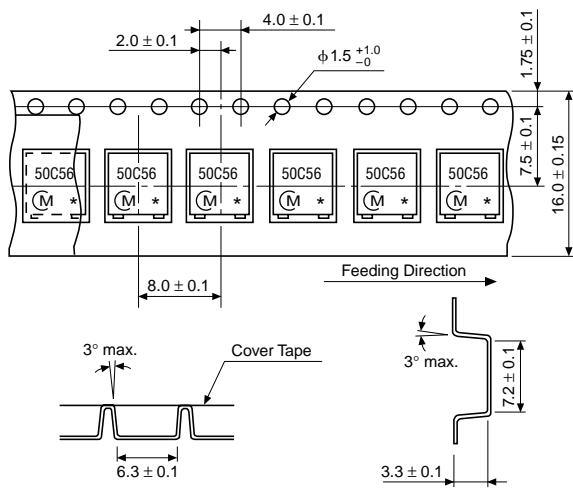

The marked part number is faced on the cover tape side.

Reel

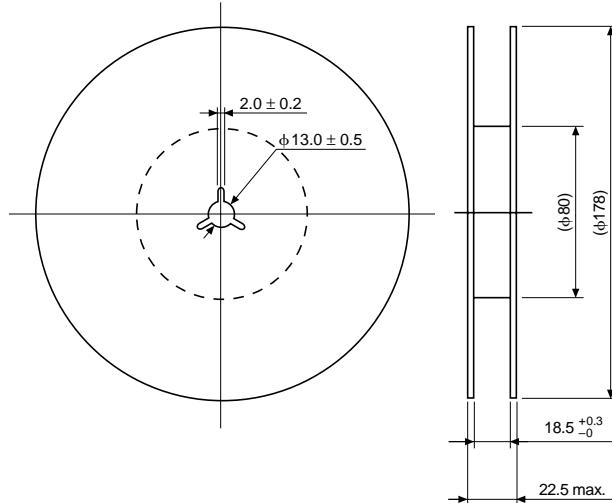

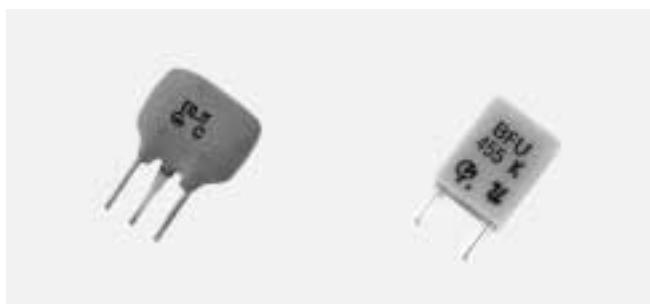

The following filters were specifically designed for signal detection circuitry used in applications such as that found in the search-stop functions of electronically tuned radios.

SPECIFICATIONS

SFE 10.7

Part Number	Center Freq. (MHz)	3dB Bandwidth (kHz)	Insertion Loss (dB max.)	Terminal Impedance (Ohms)
SFE10.7MFP1	10.7 (Nominal)	$F_n \pm 5$ min. $F_n \pm 35$ max.	6	470
DIMENSIONS: mm				
CIRCUIT				
$R_1 + R_g = R_2$ = Input/Output Impedance $C = 10\text{pF} \pm 2\text{pF}$ (including stray capacitance and input capacitance of RF Voltmeter.)				
1=INPUT 2=GND 3=OUTPUT				

SPECIFICATIONS

BFU 450/455


Part Number	Resonant Frequency (kHz)	Resonant Resistance (Ohms)	$\Delta f (f_a - f_r)$ (kHz)		
BFU450K3	450 ± 1	30	27.5 ± 4.5		
BFU450C	450 ± 1	20	14 ± 2		
BFU450C4N	450 ± 0.8	30	9 ± 2		
• Temperature Coefficient is typically 10ppm/°C					
Part Number	Center Frequency (kHz)	3dB Bandwidth (kHz)	Selectivity		
BFU455K	455 ± 2	8 ± 2	8dB @ $f_0 = -9$, 12dB @ $f_0 = +9$		
DIMENSIONS: mm					
BFU450K3/C/C4N		BFU455K			
CIRCUIT					
BFU450K3/C/C4N 					
BFU455K 					

PIEZO FILTERS

CERAMIC FILTERS FOR AM APPLICATIONS

muRata
Innovator in Electronics

SFU/SFZ/450/455kHz

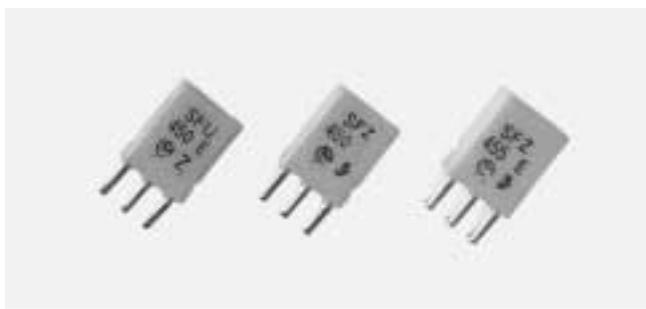


The following filters were designed to address the needs of standard AM filtering requirements. These filters are recommended for use in low cost products where economically, efficient designs are critical.

SPECIFICATIONS


Part Number	Center Frequency (kHz)	3dB Bandwidth (kHz)	Ripple (dB) max.	Selectivity $F_0 \pm 9\text{kHz}$	Termination Impedance (Ohms) max.	Spurious Response (dB) min.	Insertion Loss (dB) max.	Operating Temperature Range	Withstanding Voltage
★SFU455A	455 ± 2	10 (± 3)	0	4@-10kHz 6@+10kHz	3k	10 (1-3MHz)	5	-10°C to +80°C	50V DC
SFU455B (connected to an IFT)	462 ± 2	10 (± 3)	—	4@+10kHz 6@-10kHz	3k	10 (1-3MHz)	5	-10°C to +80°C	
SFZ455HL	455.5 ± 2	4.0 ± 1.0	1.5	23dB min.	3k	20 ($F_0 \sim 3\text{MHz}$)	7.0	-20°C to +80°C	
SFZ455JL	456 ± 2	5.5 ± 1.0	1.5	18dB min.	3k	20 ($F_0 \sim 3\text{MHz}$)	7.0	-20°C to +80°C	
SFZ450C3N	450 ± 1	2.5 (± 1)	—	30@-9kHz 24@+9kHz	3k	F_0 20 (1-3MHz)	6.5	-10°C to +80°C	

() Typ. value


DIMENSIONS: mm

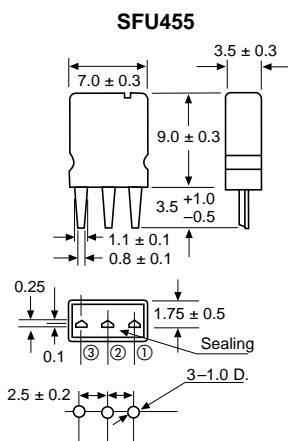


DIMENSIONS: mm

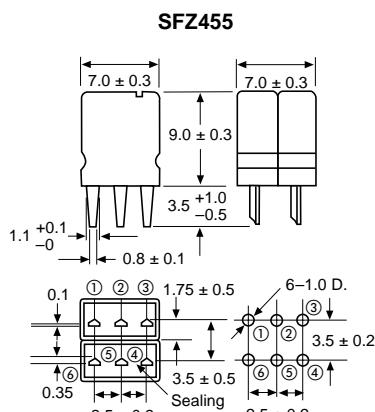

DIMENSIONS: mm

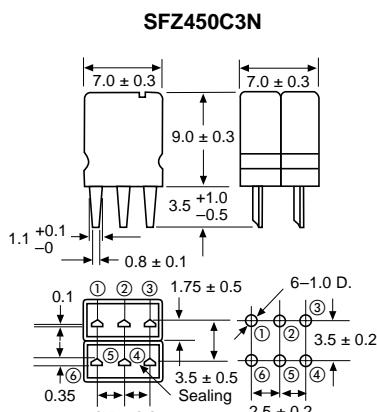


CIRCUIT

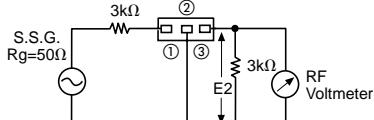


SFU455B is designed to be connected with an I.E.T.

CIRCUIT

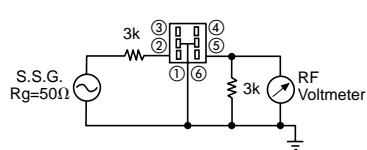

$R_g + R_1 = R_2$ = Input/Output Impedance

CIRCUIT

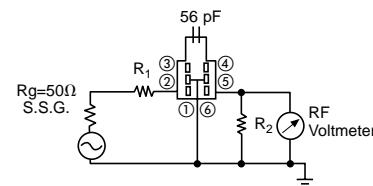


★Available as standard through authorized Murata Electronics Distributors.

PIEZO FILTERS

CERAMIC FILTERS

MHz SERIES

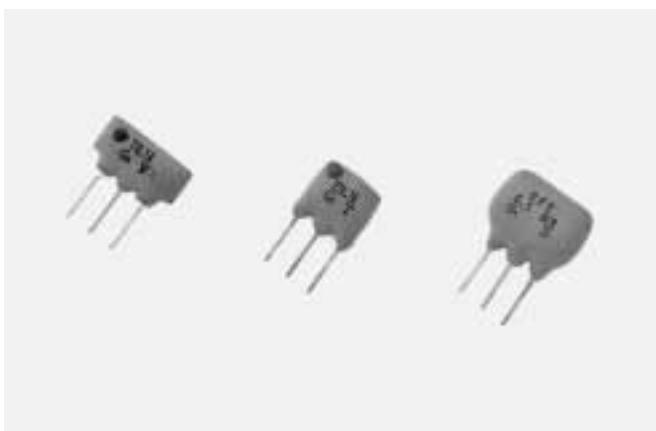

Murata Electronics' MHz series of ceramic filters are monolithic devices which utilize the energy-trapped thickness vibration-mode. This principle of operation is based upon the fact that an excellent resonating element with low spurious vibration can be obtained by adhering to certain theoretical parameters of design. These parameters include the physical dimensions of the ceramic element, the electrode pattern, and the associated mass loading effect of the electrodes.

In addition to employing the principle of energy-trapped thickness shear vibration-mode, Murata also utilizes the theory of the multicoupling mode. In short, this theory utilizes divided electrodes to "trap" different frequencies simultaneously.

The advantages of Murata's multicoupling mode technology is a highly selective, integrated ceramic filter that allows a single ceramic substrate to contain a number of coupled resonators.

Murata categorizes the SFE 10.7 family of ceramic filters according to rank of center frequency. This ranking indicates that a given SFE 10.7 filter will be marked with one of the colors listed in the following chart and will exhibit the center frequency characteristics specified below.

AVAILABLE CENTER FREQUENCY

Category	Color Code	Center Frequency (MHz)
-A	RED (ONLY)	10.70MHz, $\pm 30\text{kHz}$
-Z	RED, BLUE, ORANGE, BLACK OR WHITE*	10.70MHz, $\pm 90\text{kHz}$


*Note: Center Frequency Color Code Information—Blue (-B) = 10.67MHz $\pm 30\text{kHz}$, Orange (-C) = 10.73MHz $\pm 30\text{kHz}$, Black (-D) = 10.64MHz $\pm 30\text{kHz}$, White (-E) = 10.76MHz $\pm 30\text{kHz}$

PIEZO FILTERS

CERAMIC FILTERS LOW LOSS,
HIGHLY SELECTIVE, MINIATURE




SFE MA/MS/MJ/MH 10.7MHz

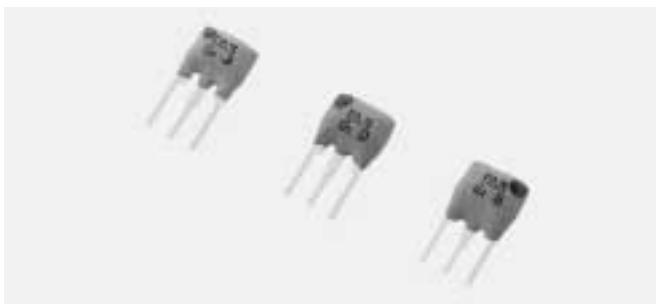


The standard SFE 10.7 line of ceramic filters are extremely reliable devices that exhibit excellent waveform symmetry. These filters have traditionally found wide application in FM receiver technology.

SPECIFICATIONS

	Part Number	3dB Bandwidth (kHz)	20dB Bandwidth (kHz) max.	Ripple (dB) max.	Insertion Loss (dB) max.	Spurious (9 ~ 12MHz) (dB) min.
FM-IF	SFE10.7MA5-A	280 ± 50	650 (520)	1	6 (4)	30 (43)
	SFE10.7MS2-A	230 ± 50	600 (420)	1	6 (4)	40 (45)
	SFE10.7MS3-A	180 ± 40	520 (380)	1	7 (4.5)	40 (45)
• Input/output impedance: 330Ω						() Typ. value
A10 Series	SFE10.7MA5A10-A	280 ± 50	590 (480)	1	2.5 ± 2.0	30 (42)
	SFE10.7MS2A10-A	230 ± 50	520 (400)	1	3.0 ± 2.0	35 (43)
	SFE10.7MS3A10-A	180 ± 40	470 (360)	1	3.5 ± 1.5	35 (43)
	SFE10.7MJA10-A	150 ± 30	360 (290)	1	4.5 ± 2.0	35 (44)
• Input/output impedance: 330Ω • Low loss and high selectivity.						() Typ. value
B10 Series	SFE10.7MA5B10-A	280 ± 50	650	1	3.0 ± 2.0	45
	SFE10.7MS2B10-A	230 ± 50	570	1	3.0 ± 2.0	45
	SFE10.7MS3B10-A	180 ± 40	520	1	5.0 ± 2.0	45
• Input/output impedance: 330Ω • High attenuation type						() Typ. value
C10 Series	SFE10.7MA5C10-A	280 ± 50	650 (540)	1	3.0 ± 2.0	30 (47)
	SFE10.7MS2C10-A	230 ± 50	570 (470)	1	3.0 ± 2.0	40 (48)
	SFE10.7MS3C10-A	180 ± 40	470 (360)	1	3.5 ± 2.0	35 (45)
	SFE10.7MJC10-A	150 ± 40	360 (300)	1	4.5 ± 2.0	35 (48)
	SFE10.7MHC10-A	110 ± 30	350 (260)	1	7.0 ± 2.0	30 (42)
• Input/output impedance: 330Ω • Most suitable for a thin type and low profile set. • The performance is the same as that of conventional types.						() Typ. value

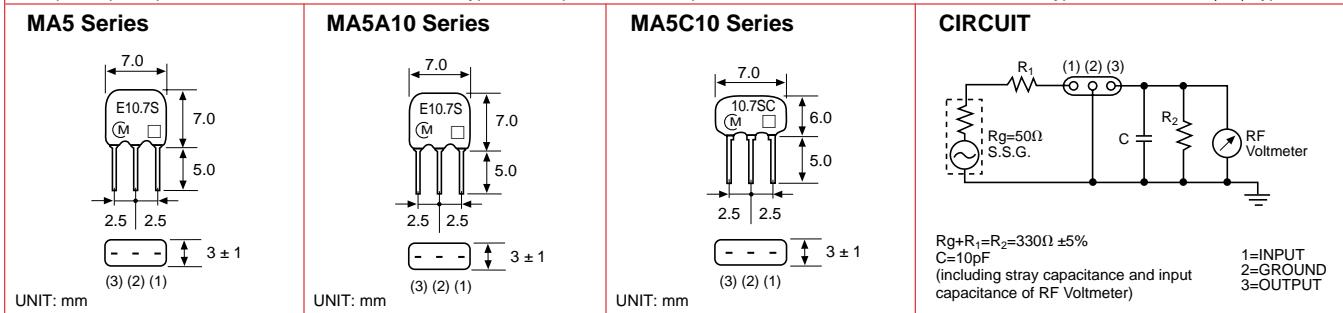

FREQUENCY CHARACTERISTICS

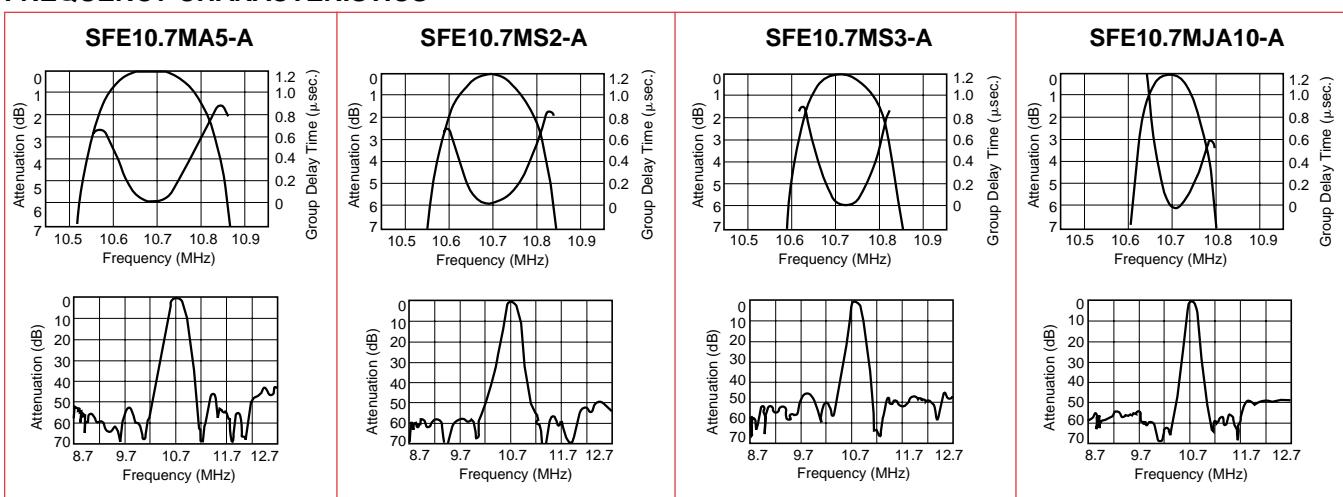

* Available as standard through authorized Murata Electronics Distributors.

PIEZO FILTERS

CERAMIC FILTERS HIGHLY SELECTIVE G.D.T. FLAT TYPE

muRata
Innovator in Electronics

SFE MX/MA8/ML 10.7MHz




The SFE 10.7MX/MA8/ML lines of ceramic filters were designed to minimize the dispersion of amplitude and phase characteristics within the pass band. Because the excellent G.D.T. characteristics of these filters insure signal integrity, they are recommended for use in applications ranging from high grade stereo receivers to digital transmission systems.

SPECIFICATIONS


	Part Number	3dB Bandwidth (kHz)	20dB Bandwidth (kHz) max.	Insertion Loss (dB) max.	Spurious (9~12MHz) (dB) min.	Ripple w/n 3dB Bandwidth (dB)	G.D.T. Bandwidth (kHz) min.
MX Series	SFE10.7MX-A	250 ± 40	670 (620)	12 (10)	25 (33)	0 max.	0.2μ sec. fo ±110kHz
	SFE10.7MX2-A	220 ± 40	610 (560)	12.5 (10.5)	30 (37)	0 max.	0.15μ sec. fo ±80kHz
	SFE10.7MZ1-A	180 ± 30	530 (460)	14 (12.3)	33 (38)	0 max.	0.15μ sec. fo ±60kHz
	SFE10.7MZ2-A	150 ± 30	500 (420)	14 (12.6)	35 (41)	0 max.	0.15μ sec. fo ±50kHz
MA8 Series	SFE10.7MA8-A	280 ± 50	650 (520)	6 (4)	30 (43)	0.5 max.	0.5μ sec. fo ±80 (±100)
	SFE10.7MS2G-A	230 ± 50	600 (420)	7 (4.5)	40 (45)	0 max.	0.5μ sec. fo ±60 (±75)
	SFE10.7MS3G-A	180 ± 40	520 (380)	9 (5)	40 (45)	0 max.	0.5μ sec. fo ±45 (±60)
ML Series	SFE10.7ML-A	280 ± 50	650 (610)	9 (7)	25 (33)	0 max.	0.25μ sec. fo ±70 (±105)
	SFE10.7MP3-A	250 ± 50	650 (550)	10 (8)	30 (35)	1.0 max.	0.25μ sec. fo ±65 (±90)
	SFE10.7MM-A	230 ± 50	600 (510)	11 (9)	30 (38)	0 max.	0.25μ sec. fo ±60 (±85)

- Input/output impedance: 330Ω
- The rank of center frequency is available in two series: 30kHz steps and 25kHz steps.
- The G.D.T. waveforms of all these types are controlled.

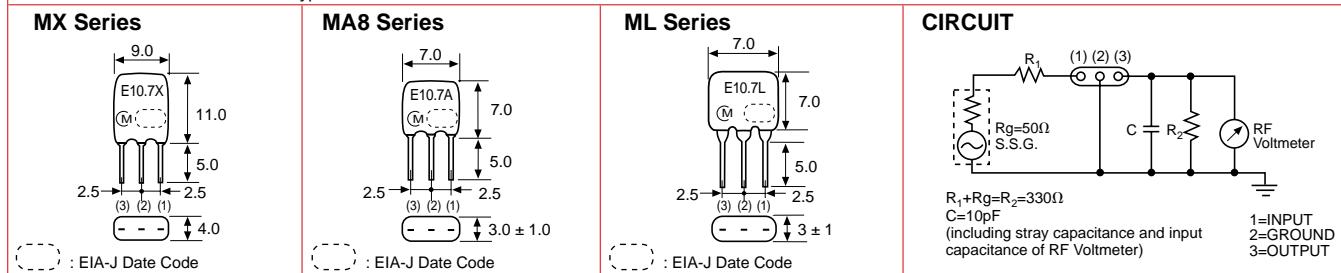


FREQUENCY CHARACTERISTICS


MX Series




MX Series




MA8 Series




SFE10.7MX2-A




ML Series




SFE10.7MS2G-A




SFE10.7MZ1-A



SFE10.7MM-A



SFE10.7MS3G-A




*Available as standard through authorized Murata Electronics Distributors.

PIEZO FILTERS

CERAMIC FILTERS LOW LOSS, WIDE OR NARROW BAND, MINIATURE

muRata
Innovator in Electronics

SFE MA/MTE/MVE/MFP 10.7MHz

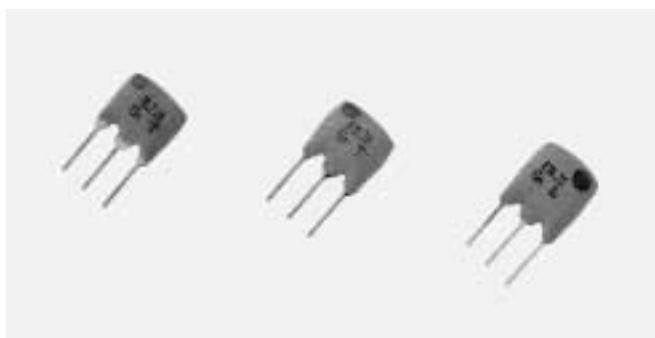


The following filters were developed to offer both narrower and wider bandwidth characteristics for use in products such as DBS receivers. These filters also retain the same reliability that is available with our standard filters. The various bandwidths allow these filters to be utilized in a multitude of new communication applications.

SPECIFICATIONS

	Part Number	3dB Bandwidth (kHz)	20dB Bandwidth (kHz) max.	Ripple Within 3dB Bandwidth (dB)	Insertion Loss (dB) max.	Spurious (9 ~ 12MHz) (dB) min.
Wide Bandwidth Series	SFE10.7MA19	350 min. (450)	950 (750)	3 max.	3 ± 2	20 (30)
	SFE10.7MA20-A	330 ± 50	680 (615)	1 max.	4 ± 2	30 (40)
	SFE10.7MA21	400 (500)	950 (750)	3 max.	3 ± 2	20 (30)
	SFE10.7MHY-A	110 ± 30	350 (260)	1 max.	7 ± 2	30 (42)
<ul style="list-style-type: none"> • Input/output impedance: 330Ω (MA20-A, MHY-A), 470Ω (MA19) () Typ. value • Center frequency 10.52MHz types of SFE10.7MHY-A is also available. 						
Narrow Bandwidth Series	SFE10.7MTE	±25 (82)	200 (160)	1 max.	5.5 ± 2.5	30 (48)
	SFE10.7MVE	±13 (56)	135 (110)	1 max.	5.5 ± 2.0	30 (41)
	SFE10.7MFP	±20 (36)	95 (77)	1 max.	6.0 (2.5)	24 (28)
<ul style="list-style-type: none"> • Input/output impedance: 330Ω (MT,MV), 600Ω (MFP) () Typ. value • Spurious range of SFE10.7MFP: 10.7 ± 1MHz. 						
MA19 Series : EIA-J Date Code MTE Series : EIA-J Date Code MVE Series : EIA-J Date Code MFP Series : EIA-J Date Code CIRCUIT						
<p> $R_g + R_1 = R_2$ = Input/Output Impedance $C = 10\text{pF}$ (including stray capacitance and input capacitance of RF Voltmeter) 1=INPUT 2=GND 3=OUTPUT </p>						

FREQUENCY CHARACTERISTICS

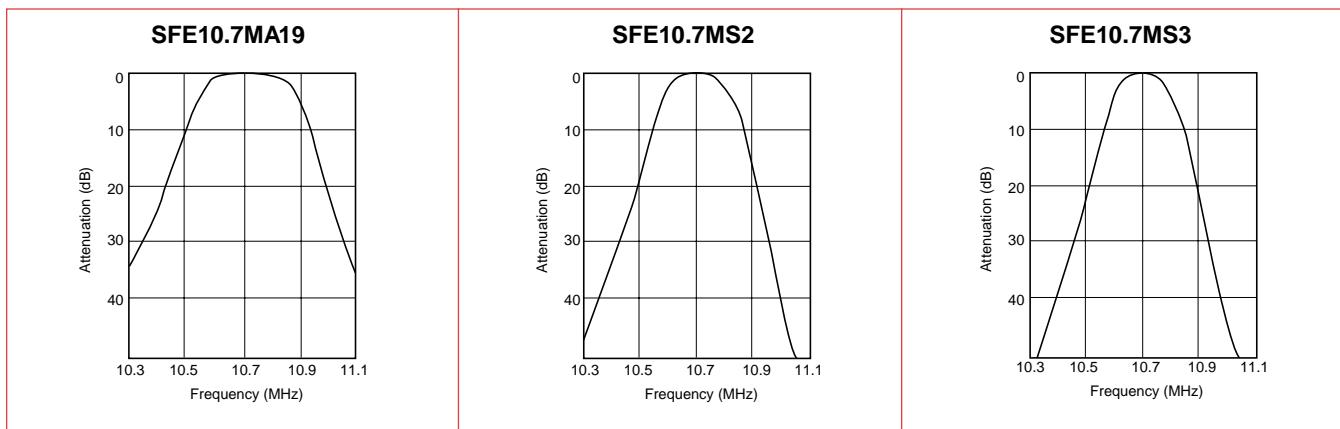


*Available as standard through authorized Murata Electronics Distributors.

PIEZo FILTERS

CERAMIC FILTERS HIGHLY SELECTIVE, 3 ELEMENT TYPE

muRata
Innovator in Electronics

SFT MA/MS 10.7MHz

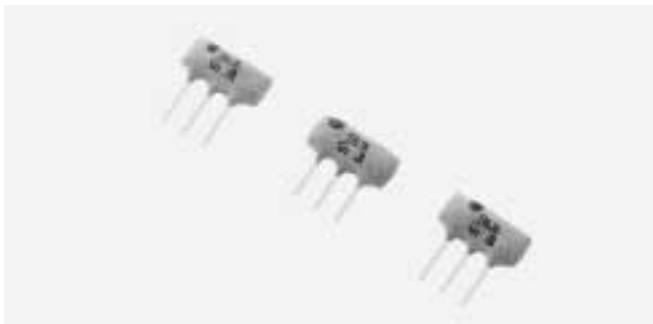

The SFT 10.7 ceramic filters are single substrate, 3 element devices that offer 1.5 times more selectivity than the conventional SFE Series of filters. The improved spurious suppression of these filters eliminates the need for cascading multiple filtering devices; therefore, it is possible to design a more compact circuit board configuration.


SPECIFICATIONS

SFT MA/MS 10.7MHz

Part Number	3dB Bandwidth (kHz)	40dB Bandwidth (kHz) max.	Ripple within 3dB Bandwidth (dB)	Insertion Loss (dB) max.	Spurious Attenuation (9 to 12MHz) (dB) min.
SFT10.7MA5	280 ± 50	700 (630)	0.5 max.	6 ± 2	50 (60)
SFT10.7MS2	230 ± 40	650 (580)	0.5 max.	6 ± 2	50 (60)
SFT10.7MS3	180 ± 40	550 (500)	0.5 max.	8 ± 2	50 (60)


- Input/output impedance: 330Ω
 - High selectivity is achieved by replacing with SFT10.7 series

DIMENSIONS: mm

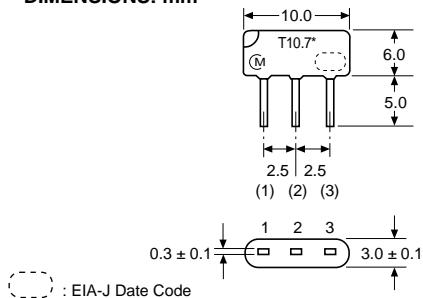

*Varies by part number


CIRCUIT

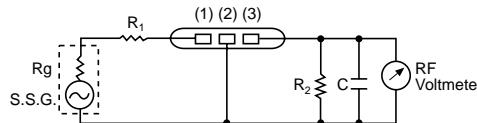


$R_g + R_i = 330\Omega$
 $C = 10\text{pF}$
 (including stray capacitance and input
 capacitance of RF Voltmeter.)

1=INPUT
2=GND
3=OUTPUT

FREQUENCY CHARACTERISTICS

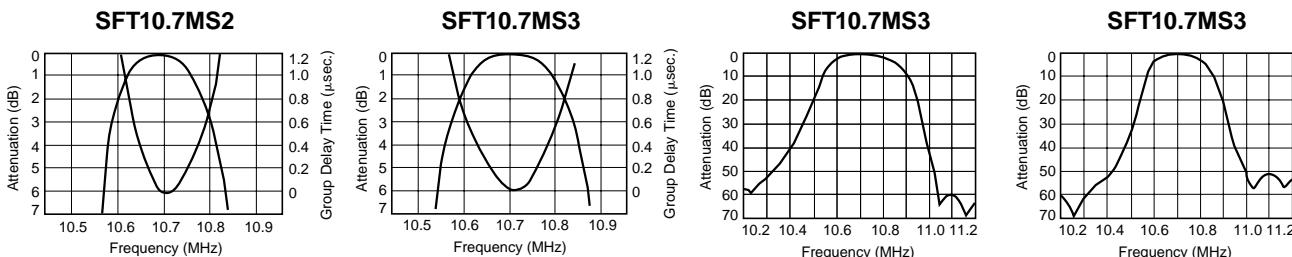

TYPICAL SPURIOUS RESPONSE CHARACTERISTICS

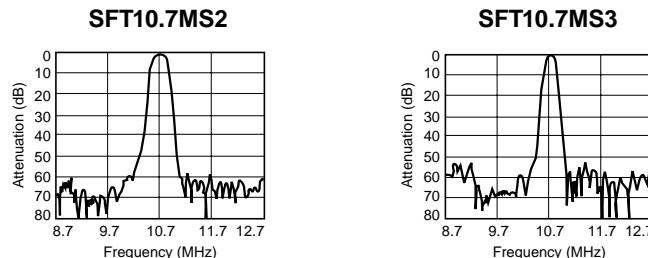

PIEZO FILTERS

CERAMIC FILTERS

ULTRA-WIDE BANDWIDTH

muRata
Innovator in Electronics

KMFC545 10.7MHz



New digital applications are pushing the bandwidth requirements wider on 10.7MHz filters. This matched filter pair is designed to be used in applications that require the widest possible bandwidth at 10.7MHz. These applications can include receivers, audio/video equipment, and measurement equipment.


SPECIFICATIONS

KMFC545 10.7MHz


Nominal Center Frequency (fn)	3dB Bandwidth (kHz) min.	20dB Bandwidth (kHz) max.	Insertion Loss (dB) max.	Ripple within 3dB Bandwidth (dB)	Spurious Response (8 ~ 13MHz) (dB) min.	Withstanding Voltage (DC)	Insulation Resistance (M Ohms) min.
10.7MHz	±325	1400	6.0	2.0 max.	23	50V, 1 min.	100 (DC 100V)

• Input/output impedance: 470Ω

DIMENSIONS: mm

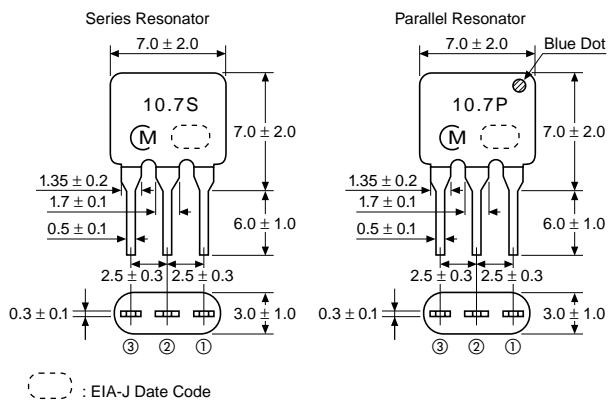

TEST CIRCUIT

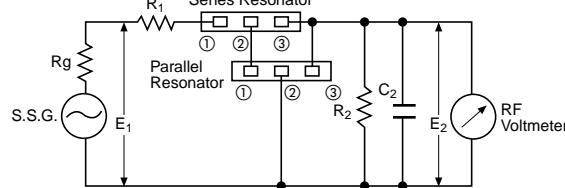

$R_1 = 420\Omega \pm 5\%$; $R_2 = 420\Omega \pm 5\%$; $R_g = 50\Omega$
 $C_2 = 10\text{pF}$ (Including stray capacitance and
input capacitance of RF Voltmeter)

$$\text{Insertion Loss (dB)} = 20 \cdot \log \left(\frac{E_1}{2 \cdot E_2} \right)$$

①: INPUT
②: GROUND
③: OUTPUT

PIEZO FILTERS

CERAMIC FILTERS


TAPING & PACKAGING SPECIFICATIONS

muRata
Innovator in Electronics

SFE 10.7MHz

TAPING DIMENSIONS

SFE10.7M□□-* -TF21

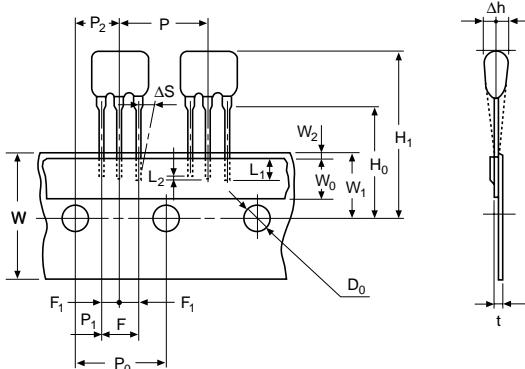

PACKAGING DIMENSIONS: mm

Item	Code	Dimensions (mm)	Note
Adhered Terminal Length	L ₁	3 min.	
	L ₂	2.0 max.	Pay attention to directivity
Pitch of Component	P	12.7 ± 0.5	
Pitch of Sprocket Hole	P ₀	12.7 ± 0.2	
Length from Hole Center to Lead	P ₁	3.85 ± 0.5	
Length from Hole Center to Component Center	P ₂	6.35 ± 0.5	
Lead Spacing (1)	F	5.0 ^{+0.5} _{-0.2}	
Lead Spacing (2)	F ₁	2.5 ± 0.2	
Deviation across Tape	Δh	0 ± 1.0	
Deviation along Tape Left or Right	Δs	0 ± 1.0	
Carrier Tape Width	W	18.0 ± 0.5	
Hold-down Tape Width	W ₀	6.0 min.	Hold-down tape should not overflow the base tape
Position of Sprocket Hole	W ₁	9.0 ± 0.5	
Margin between Both Tapes	W ₂	0 ^{+1.0} ₋₀	
Lead Distance between Reference and Bottom Planes	H ₀	18.0 ± 0.5	
Diameter of Sprocket Hole	D ₀	Φ4.0 ± 0.2	
Total Tape Thickness	t	0.6 ± 0.2	

- When packaged, components of different center frequencies are not mixed.
- Compatible with various automatic insertion.
- Flat pack is the standard package type.

PIEZO FILTERS

SURFACE MOUNTED CHIP PIEZOELECTRIC CERAMICS FILTERS FOR AM AND FM APPLICATIONS SFECV 10.7MHz, CF

muRata
Innovator in Electronics

Along with the development of the AM chip filter, IF filters for AM/FM radios have also been made smaller, thinner and in a chip configuration for surface mounting. This is one more example of Murata Electronics' leadership in converting conventional electronic components to chip technology.

SPECIFICATIONS

SFECV10.7

Part Number	Nominal Center Frequency (fn) (MHz)*	3dB Bandwidth from fn (kHz)	Spurious Attenuation min.	Insertion Loss at fn (dB) max.	Input/Output Impedance (Ohms)
SFECV10.7MA21S-TC	10.7	400 min.	20dB (10.7 to 15.0MHz)	3.0 ±2.0	470
SFECV10.7MA19S-TC	10.7	350 min.	20dB (10.7 to 15.0MHz)	3.0 ±2.0	470
SFECV10.7MA2S-A-TC	10.7	330 ± 50	30dB (9 to 12MHz)	4.0 ±2.0	330
SFECV10.7MA5S-A-TC	10.7	280 ± 50	35dB (9 to 12MHz)	3.0 ±2.0	330
SFECV10.7MS2S-A-TC	10.7	230 ± 50	35dB (9 to 12MHz)	3.5 ±2.0	330
SFECV10.7MS3S-A-TC	10.7	180 ± 40	35dB (9 to 12MHz)	4.0 ±2.0	330
SFECV10.7MJS-A-TC	10.7	150 ± 30	35dB (9 to 12MHz)	5.5 ±2.0	330
SFECV10.7MHS-A-TC	10.7	110 ± 30	35dB (9 to 12MHz)	6.0 ±2.0	330



* A: 10.70MHz ± 30kHz Z: 10.70MHz ± 90kHz

Packaging Units: 2000 pcs/reel (180 mmD)


SPECIFICATIONS

CFEC10.8*

Part Number	Nominal Center Frequency (fn) (MHz)	3dB Bandwidth from fn (kHz)	20dB Bandwidth from fn (kHz) max.	Stopband Attenuation fn ± 500kHz (dB) min.	Stopband Attenuation fn ± 1.2kHz (dB) min.	Spurious 9 to 12MHz (dB) min.	Insertion Loss at fn (dB) max.	Ripple (dB) max.	GDT Deviation (μ.sec) max.	Input/Output Impedance (Ohms)
CFEC10.8MK1-TC	10.8	±110 to ±150	±310	37	35	—	6	(fn ± 100kHz) 0.5	(fn ± 100kHz) 1.5	330
CFEC10.8MG1-TC	10.8	±135 to ±180	±350	32	35	—	6	(fn ± 100kHz) 0.5	(fn ± 100kHz) 1.2	330
CFEC10.8ME11-TC	10.8	±150	±420	—	—	25	5	(fn ± 110kHz) 1	(fn ± 110kHz) 1.5	330
CFEC10.8MD11-TC	10.8	±170	±450	—	—	25	5	(fn ± 170kHz) 1	(fn ± 170kHz) 2.0	600

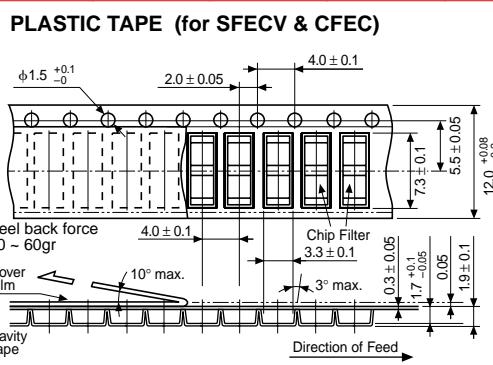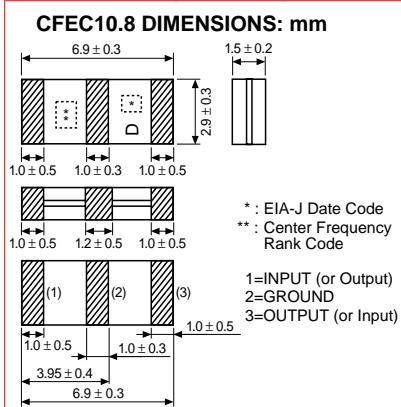

Note: Marked sides face to cover tape. Lead positions are as per above figure. One kind of frequency rank filters are packed in a reel.

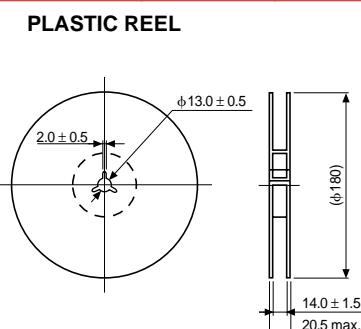

Note: No parts in leader cavity and tail end.
2000 pcs min./reel


* CFEC also available with center frequency of 10.75 or 10.7 MHz

PIEZO FILTERS

CERAMIC DISCRIMINATORS FOR FM RECEIVER

muRata
Innovator in Electronics

CDA 10.7MHz

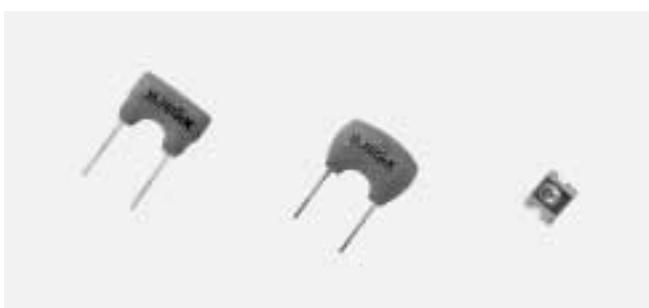

The CDA 10.7 line of ceramic discriminators are resonate devices that offer adjustment free audio detection in both wide and narrow bandwidths. These IC dependent devices utilize FM specific detection methods to convert changes in frequency into an intelligible audio signal.


LEADED CERAMIC DISCRIMINATORS

Part Number	IC Mfg.	IC Number
CDA10.7MG1-A	Sony	CX-20029/CX-20111
CDA10.7MG2-A	Sony	CX-831
CDA10.7MG4-A	Rohm	BA4234L
CDA10.7MG6-A	Toshiba	TA7640AP
CDA10.7MG7-A	Sanyo	LA1260
CDA10.7MG8-A	Toshiba	TA7303P
CDA10.7MG9-A	Toshiba	TA7130P
CDA10.7MG12-A	Sony	CXA1030P
CDA10.7MG13-A	Matsushita	AN7007SU
CDA10.7MG14A-A	Matsushita	AN7006S
CDA10.7MG15-A	Sanyo	LA1816
CDA10.7MG16-A	Toshiba	TA8122AN
CDA10.7MG17-A	Philips	TEA5591
CDA10.7MG18-A	Toshiba	TA8132N
CDA10.7MG19-A	Rohm	BA1440
CDA10.7MG20-A	Signetics	NE604
CDA10.7MG21-A	Signetics	TBA229-2
CDA10.7MG22-A	Sanyo	LA1810
CDA10.7MG23-A	Sanyo	LA7770
CDA10.7MG24-A	Philips	TDA2557
CDA10.7MG25V-A	Telefunken	U829B
CDA10.7MG26-A	Sanyo	LA1805
CDA10.7MG27-A	Sony	CXA1238
CDA10.7MG28-A	Telefunken	U2501B
CDA10.7MG29-A	Signetics	TBA120U
CDA10.7MG30-A	Philips	TE5592
CDA10.7MG31-A	Toshiba	TA2003
CDA10.7MG32-A	Sony	CXA1343M
CDA10.7MG33-A	Toshiba	TA2007
CDA10.7MG34V-A	Telefunken	U4490B
CDA10.7MG35-A	Philips	TEA5594
CDA10.7MG36-A	Toshiba	TA2029
CDA10.7MG37-A	Sanyo	LA1830
CDA10.7MG39-A	Toshiba	TA8186
CDA10.7MG40-A	Philips	TEA5710
CDA10.7MG41-A	Rohm	BA4220
CDA10.7MG42-A	Signetics	SA605
CDA10.7MG43-A	Sanyo	LA1831
CDA10.7MG45-A	Toshiba	TA2008
CDA10.7MG46-A	Sanyo	LA1832
CDA10.7MG47A-A	Signetics	SA626
CDA10.7MG48-A	Sanyo	LA1835
CDA10.7MG49-A	Motorola	MC13156
CDA10.7MG50-A	Toshiba	TA2022
CDA10.7MG51-A	Siemens	TDA1576T



Note: The -A suffix designates 10.7MHz center frequency with $\pm 30\text{kHz}$ tolerance. The -Z suffix designates a 10.7MHz center frequency with a $\pm 90\text{kHz}$ tolerance and is also available. See page 447.

SURFACE MOUNT CERAMIC DISCRIMINATORS


Part Number	IC Mfg.	IC Number
CDACV10.7MC1-A-TC	Sony	CX-20091
CDACV10.7MG1-A-TC	Sony	CX-20029
CDACV10.7MG16F-A-TC	Toshiba	TA8122AF
CDACV10.7MG18-A-TC	Toshiba	TA8132F
CDACV10.7MC40-A-TC	Philips	TEA5710
CDACV10.7MG50-A-TC	Toshiba	TA2022
CDACV10.7MG51-A-TC	Siemens	TDA1576T
CDACV10.7MG53-A-TC	National	AN7232
CDACV10.7MG54-A-TC	Sony	CXA1376
CDACV10.7MG69-A-TC	Sony	CXA1538N

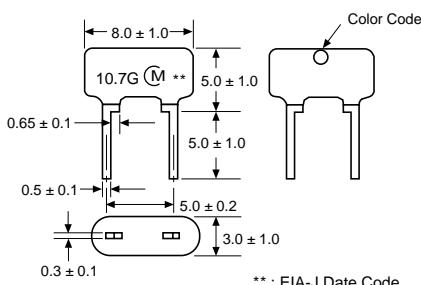LEADED DIMENSIONS: mm
CDA TYPE

TYPICAL CIRCUIT

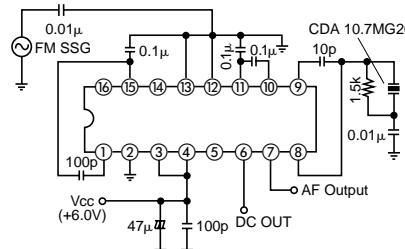SURFACE MOUNT DIMENSIONS: mm
CDACV TYPE

RECOMMENDABLE LAND PATTERN: mm



PIEZO FILTERS
CERAMIC FILTERS
HIGHLY ACCURATE TV/VCR TYPE

muRata
Innovator in Electronics

SFSH 4.5–6.5MHz



The SFSH lines of ceramic filters are high quality devices designed to address the TV/VCR/CATV/DBS markets. The SFSH lines are utilized as IF filters in virtually every type of technology currently used in the television industry.

SPECIFICATIONS

Part Number	3dB Bandwidth (kHz) min.	20dB Bandwidth (kHz) max.	Insertion Loss (dB) max.	Spurious Response (dB) min.	Input/Output Impedance (Ohms)
SFSH4.5MCB	$\pm 60 (\pm 110)$	600 (470)	6 (3.2)	30 (0 ~ 4.5MHz)	1k
SFSH5.5MCB	$\pm 60 (\pm 115)$	600 (500)	6 (3.6)	30 (0 ~ 5.5MHz)	600
SFSH6.0MCB	$\pm 60 (\pm 110)$	600 (500)	6 (4.0)	30 (0 ~ 6.0MHz)	470
SFSH6.5MCB	$\pm 70 (\pm 110)$	650 (530)	6 (3.6)	30 (0 ~ 6.5MHz)	470
SFSH4.5MDB	$\pm 70 (\pm 130)$	750 (520)	6 (3.0)	30 (0 ~ 4.5MHz)	1k
SFSH5.5MDB	$\pm 80 (\pm 150)$	750 (640)	6 (3.0)	30 (0 ~ 5.5MHz)	600
SFSH6.0MDB	$\pm 80 (\pm 155)$	750 (630)	6 (3.8)	30 (0 ~ 6.0MHz)	470
SFSH6.5MDB	$\pm 80 (\pm 150)$	800 (640)	6 (3.4)	30 (0 ~ 6.5MHz)	470
SFSH4.5MEB2	$\pm 125 (\pm 180)$	850 (740)	6 (3.5)	25 (0 ~ 4.5MHz)	1k

*5.5, 6.0, 6.5MHz types are also available

() Typ. value


SFSH 4.5–6.5MHz

DIMENSIONS: mm	CIRCUIT	CHARACTERISTICS (Typ.)
 1=INPUT 2=GND 3=OUTPUT ** : EIA-J Date Code	 Rg+R ₁ =R ₂ =Input/Output Impedance C=10pF (including stray capacitance and input capacitance of RF Voltmeter)	

PIEZO FILTERS CERAMIC TRAPS HIGH ATTENUATION



TPS MJ/MB 4.5–6.5MHz

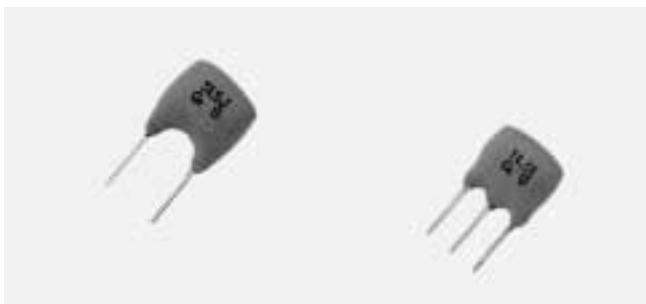

The TPS MJ/MB lines of ceramic traps are band reject filters used for video and sound IF attenuation. The 2 terminal TPS MJ Series can be used to attenuate either the sound signal in B/W receivers or the chroma signal in video. The 3 terminal TPS MB Series contains 2 trap elements on one substrate for additional attenuation. This line of traps can be used in the sound IF of CATV/VCR receivers.

SPECIFICATIONS

TPS MJ 4.5–6.5MHz

Part Number	Nominal Center Frequency (fn)	Attenuation at fn (dB) min.	20dB Attenuation Bandwidth (kHz) min.	Spurious Response (0 to fn) (dB) max.
*TPS3.58MJ	3.58MHz	20 (27)	20 (30)	0.5 (0)
TPS4.43MJ	4.43MHz	20 (30)	40 (50)	0.5 (0)
*TPS4.5MJ	4.5MHz	20 (30)	30 (50)	0.5 (0)
*TPS5.5MJ	5.5MHz	20 (30)	30 (60)	0.5 (0)
*TPS6.0MJ	6.0MHz	20 (30)	40 (70)	0.5 (0)
TPS6.5MJ	6.5MHz	20 (30)	40 (90)	0.5 (0)

() Typ. value

DIMENSIONS: mm	CIRCUIT	CHARACTERISTICS

SPECIFICATIONS

TPS MB 4.5–6.5 MHz

Part Number	Nominal Center Frequency (fn)	Attenuation at fn (dB) min.	30dB Attenuation Bandwidth (kHz) min.	Spurious Response (0 to fn) (dB) max.
*TPS4.5MB2	4.5MHz	35 (45)	50 (80)	0.5 (0)
*TPS5.5MB	5.5MHz	35 (45)	70 (120)	0.5 (0)
*TPS6.0MB	6.0MHz	35 (45)	70 (120)	0.5 (0)
*TPS6.5MB	6.5MHz	35 (45)	70 (120)	0.5 (0)

The level at 1 MHz shall be made for a reference (0dB)
Other frequencies (3.58, 4.43 MHz) are also available.

() Typ. value

DIMENSIONS: mm	CIRCUIT	CHARACTERISTICS


* Available as standard through authorized Murata Electronics Distributors.

PIEZO FILTERS

CERAMIC DISCRIMINATORS FOR QUADRATURE DETECTION

mURATA
Innovator in Electronics

CDA MC/ME 4.5–6.5MHz




The CDA MC/ME lines of ceramic discriminators are IC dependent devices used in the recovery of audio signals. The CDA MC discriminators have three terminals while the CDA ME discriminators are 2 terminal devices.

MATCHING IC

Part Number	IC	Part Number	IC	Part Number	IC
CDA□MC10	TBA120T	CDA□MC22	M51354AP	CDA□MC30	M51348FP
CDA□MC15	TA7146P	CDA□MC23	M51316P	CDA□MC31	TDA4282T
CDA□MC16	TDA4940	CDA□MC24B	LA7520	CDA□MC32	LA7522
CDA□MC17	TDA4280	CDA□MC25	LA7521	CDA□MC33	μPC1416G
CDA□MC18	HA11229	CDA□MC26	LA7530 (N)	CDA□MC34	TBA130-2
CDA□MC19	μPC1391H	CDA□MC27	μPC1411CA	CDA□MC35	M51345FP
CDA□MC20	μPC1382C	CDA□MC28	M51316BP		
CDA□MC21	μPC1383C	CDA□MC29	M51365SP		


Indicates frequency 4.5, 5.5, 5.74, 6.0, 6.5 MHz are available. Note that part numbers, circuits and ratings vary according to the IC used at detector process.

DIMENSIONS: mm




(---) : EIA-J Date Code

CIRCUIT

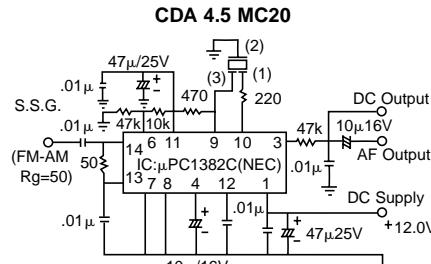

(1)=INPUT
(2)=GROUND
(3)=OUTPUT

RECOVERED AUDIO CHARACTERISTICS




Test Conditions= 100 dB_V
400 Hz, ± 7.5kHz Dev.

MATCHING IC

Part Number	IC	Part Number	IC	Part Number	IC
CDA□ME1	CX-20014	CDA□ME8	TBA129	CDA□ME23	M51496P
CDA□ME2	AN5135	CDA□ME10	TDA2546A	CDA□ME27	LA7650
CDA□ME3	TA7678AP	CDA□ME19	M51346BP	CDA□ME30	CXA1110AS
CDA□ME5	AN5135NK	CDA□ME20	LA7550	CDA□ME34	TA8680N
CDA□ME6	M51346AP	CDA□ME21	LA7545	CDA□ME35	LA7680
CDA□ME7	TDA4503	CDA□ME22	TDA2556	CDA□ME37	TA8691N


Indicates frequency 4.5, 5.5, 5.74, 6.0, 6.5 MHz are available. Note that part numbers, circuits and ratings vary according to the IC used at detector process.

DIMENSIONS: mm



(---) : EIA-J Date Code

CIRCUIT

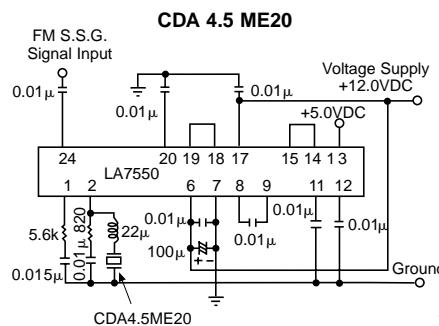

Voltmeter
Recovered
Audio Signal


PIEZO FILTERS

SAW FILTERS FOR AUDIO VISUAL EQUIPMENT

COLOR TV/VCR SIF



SAF Series

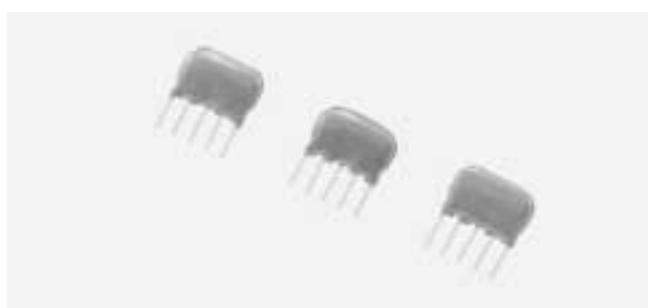


This series of saw filters is designed for TV/VCR applications. These filters are capable of passing 1) SIF and PIF, 2) SIF or 3) PIF. Saw filters are made up of zinc oxide on a glass substrate. Murata provides saw filters for a variety of television standards worldwide.

SPECIFICATIONS

Part Number	Insertion Loss (dB) max.	Picture Carrier (dB) max.	Chroma Carrier (dB) min.	Attenuation (dB) max. at fs-0.3MHz	Attenuation (dB) max. at fs+0.3MHz	Adjacent Sound Carrier (dB) min.	Adjacent Picture Carrier (dB) min.	Spurious Response (dB) min.	Spurious Response (dB) min.	Temperature Coefficient (ppm/°C)
SAF54MC200Z	16(13)	40 min.	17	3	3	40	37	28 (0~52.75MHz)	30 (56.75~70MHz)	-28 ± 20
SAF41MC200Z	17(14)	40 min.	17	3	3	40	37	28 (0~39.75MHz)	30 (43.75~56MHz)	-28 ± 20
SAF39.2MC70Z	19(14)	40 min.	35	6	6	40	30	30 (28~31.2MHz)	30 (40.7~45MHz)	-10 ± 20
SAF33.4MC200Z	20(18)	40 min.	20	4	4	40	35	30 (0~31.9MHz)	30 (40.4~47MHz)	-10 ± 20
SAF54MD200Z	20(17)	within ±3	20	fs~0.2MHz 3	fs~0.2MHz 3	35	30	30 (0~70MHz)	15 ¹ (55.5~57.5MHz)	-28 ± 20
SAF41MD200Z	17(14)	within ±3	20	fs~0.2MHz 3	fs~0.2MHz 3	35	35	30 (0~55MHz)	15 ¹ (42.5~44.5MHz)	-28 ± 20
SAF33.4MD200Z	20.5(16)	within ±3	20	fs~0.2MHz 3	fs~0.2MHz 3	35	35	30 (0~50MHz)	15 ¹ (34.67~37.7MHz)	-10 ± 20
SAF33.0MDA70Z	26(23)	5.0 ± 3.0	12	fs~0.2MHz 3	fs~0.2MHz 3	26	20	15 (0~39.5MHz)	8 ¹ (34.67~37.7MHz)	-10 ± 20
SAF32.9MDE70Z	25(23)	4.3 ± 3.0	15	fs~0.2MHz 3	fs~0.2MHz 3	35	25	22 (0~31.5MHz)	10 ¹ (35.27~38MHz)	-10 ± 20
SAF31.4MD70Z	28(26)	within ±3	15	fs~0.2MHz 3	fs~0.2MHz 3	35	35	30 ¹ (0~45MHz)	15 ¹ (32.645~35.675MHz)	-10 ± 20


DIMENSIONS: mm

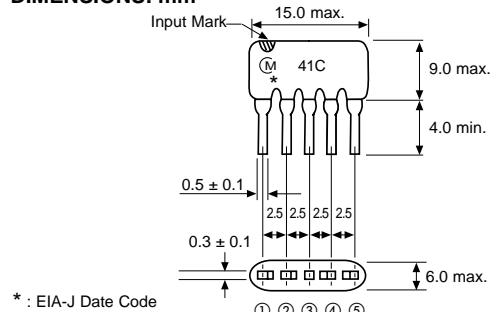

SAF-200Z

- ① Input
- ② Input Ground
- ③ Ground
- ④ Output
- ⑤ Output

DIMENSIONS: mm

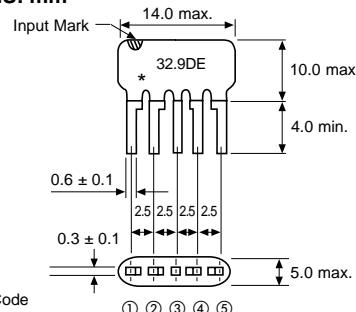

SAF-70Z

- ① Input
- ② Input Ground
- ③ Ground
- ④ Output
- ⑤ Output

- SAF54MC200Z, SAF41MC200Z and SAF33.4MC200Z are for Split Carrier System.
- SAF54MD200Z, SAF41MD200Z, SAF33.4MD200Z and SAF31.4MD70Z are for Quasi-Parallel System.


- SAF33.0MDA70Z is for Multi-Sound TV in Northern Europe. (): Typ. values

- SAF32.9MDE70Z is for Multi-Sound TV in U.K.

- 0dB level should be at fs.

¹Minimum attenuation between picture carrier and sound carrier


FREQUENCY CHARACTERISTICS

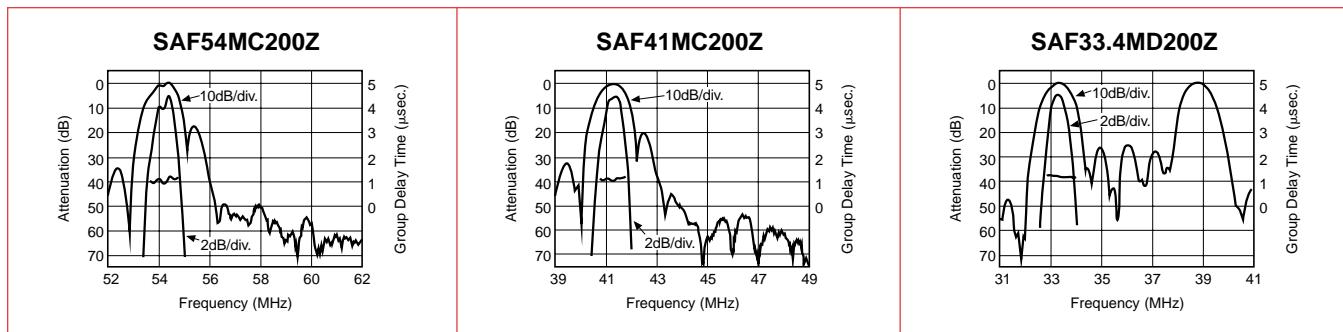

PIEZO FILTERS

SAW FILTERS FOR AUDIO VISUAL EQUIPMENT MULTI TV/VCR SIF

muRata
Innovator in Electronics
SAF Series

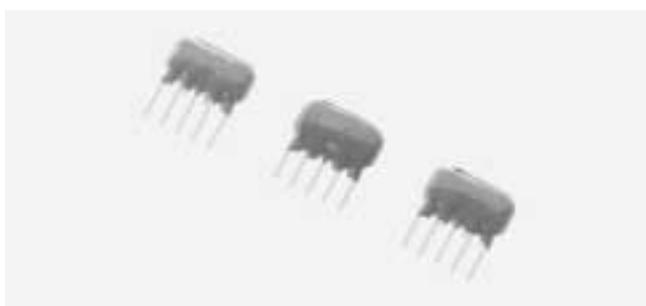

This series of saw filters is designed for TV/VCR applications. These filters are capable of passing 1) SIF and PIF, 2) SIF or 3) PIF. Saw filters are made up of zinc oxide on a glass substrate. Murata provides saw filters for a variety of television standards worldwide.


SPECIFICATIONS

SAF


Part Number	Insertion Loss (dB) max.	Picture Carrier (dB) max.	Chroma Carrier (dB) min.	Attenuation (dB) max. at fs-0.3MHz	Sound 1 (fs1) Carrier (dB) max.	Sound 2 (fs2) Carrier (dB) max.	Attenuation (dB) max. at fs+0.3MHz	Adjacent Sound Carrier (dB) min.	Adjacent Picture Carrier (dB) min.	Spurious Response (dB) min.	Spurious Response (dB) min.	Temperature Coefficient (ppm/°C)
SAF32.0MCA70Z	26(23)	35(55)	25(35)	6	3	3	6	40(55)	35(50)	30 (0~30MHz)	22 (33.57~42MHz)	-10 ± 20
SAF32.9MCA70Z	25(22)	35(53)	25(34)	6	3	3	6	40(55)	35(43)	30 (0~30.9MHz)	22 (34.47~42MHz)	-10 ± 20
SAF33.4MCB200Z	29(26)	30(47)	14(30)	6	3	3	6	30(46)	35(50)	25 (0~30.9MHz)	25 (40.4~46.0MHz)	-10 ± 20
SAF33.4MCD70Z	29(26)	30(49)	20(37)	2 [32.348 MHz]	2	2.5	8	30(50)	28(42)	25 (0~30.9MHz)	30 (40.4~46.0MHz)	-10 ± 20

DIMENSIONS: mm

SAF-200Z

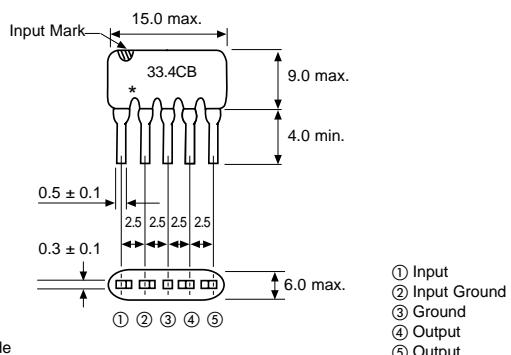

SAF-70Z

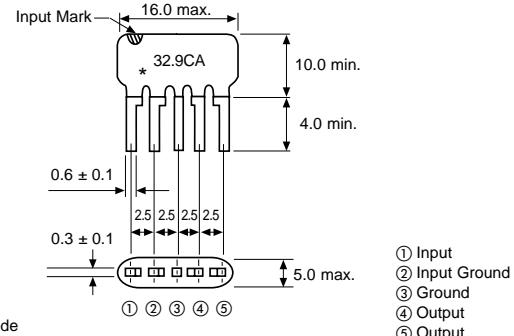

* : EIA-J Date Code


* : EIA-J Date Code

- Since the insertion loss of surface acoustic wave filters varies with the matching state, the values of insertion loss in the table are not always in conformity with insertion loss of the actual circuit.

(): Typ. values

- fp—picture carrier, fc—chroma carrier, fs—sound carrier, fas—adjacent sound carrier, fap—adjacent picture carrier.


FREQUENCY CHARACTERISTICS

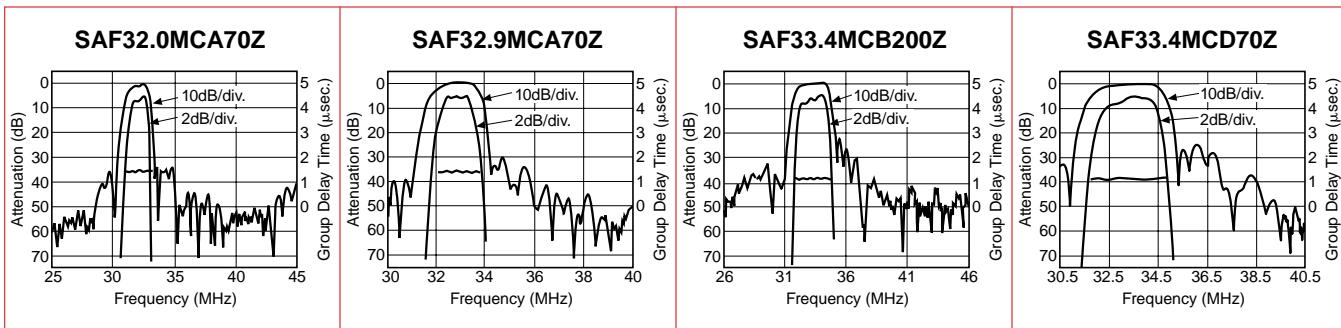

PIEZO FILTERS

SAW FILTERS FOR AUDIO VISUAL EQUIPMENT MULTI TV/VCR/VIF

muRata
Innovator in Electronics
SAF Series

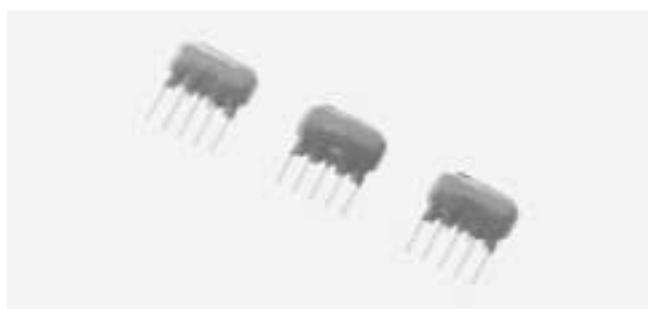

This series of saw filters is designed for TV/VCR applications. These filters are capable of passing 1) SIF and PIF, 2) SIF or 3) PIF. Saw filters are made up of zinc oxide on a glass substrate. Murata provides saw filters for a variety of television standards worldwide.


SPECIFICATIONS

SAF

Part Number	Insertion Loss (dB) max.	Picture Carrier (dB)	Chroma Carrier (dB)	Sound 1 Carrier (dB)	Sound 2 Carrier (dB)	Sound 3 Carrier (dB)	Adjacent Sound Carrier (dB) min.	Adjacent Picture Carrier (dB) min.	Spurious Response (dB) min.	Temperature Coefficient (ppm/°C)	System
SAF38.0MZE210Z	27(22)	4.8 ± 1.2	3.8 ± 1.3	17.5 ± 3.0	—	17.0 ± 3.0	40(53)	40(53)	30(43)	-10 ± 20	D/K/B/G/I
SAF38.0MZJ80Z	29(26)	5.1 ± 1.2	4.1 ± 1.5	22.0 ± 3.0	—	19.5 ± 3.0	40(56)	40(55)	30(40)	-10 ± 20	D/K/B/G/I
SAF38.9MX200Z	26(23)	5.0 ± 1.2	3.4 ± 1.0	18.0 ± 3.0	15.0 ± 3.0	22.0 ± 4.0	40(48)	35(41)	30(38)	-10 ± 20	B/G/I/D/K
SAF38.9MZA80Z	25(22)	4.5 ± 1.3	4.5 ± 1.3	16.5 ± 3.0	15.0 ± 3.0	20.0 ± 3.0	45(53)	40(58)	30(46)	-10 ± 20	B/G/I/D/K
SAF38.9MZC200Z	25.5(22)	3.7 ± 1.3	4.3 ± 1.3	15.5 ± 3.0	—	16.5 ± 3.0	40(50)	40(47)	30(36)	-10 ± 20	B/G/I/D/K

DIMENSIONS: mm


SAF-200Z/210Z

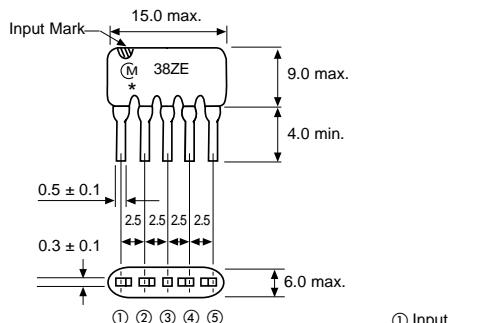

* : EIA-J Date Code

① Input
② Input Ground
③ Ground
④ Output
⑤ Output

SAF-80Z

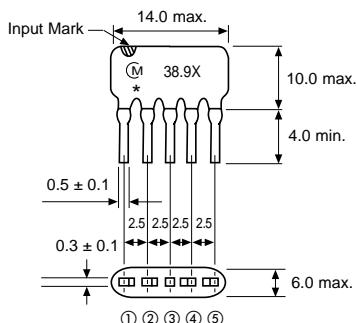


① Input
② Input Ground
③ Ground
④ Output
⑤ Output

* : EIA-J Date Code


(): Typ. values

FREQUENCY CHARACTERISTICS


SAF38.0MZE210Z

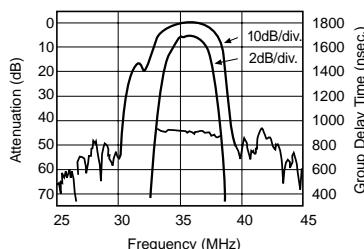

SAF38.9MX200Z

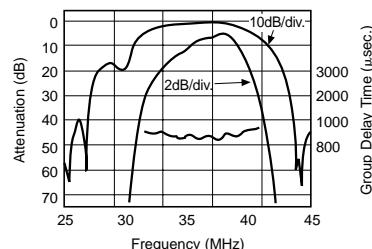

SAF38.9MZA80Z

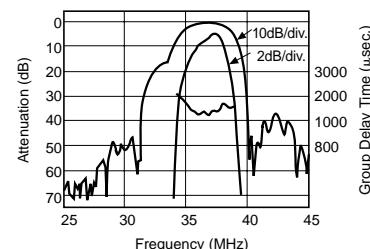


PIEZO FILTERS

SAW FILTERS

FOR AUDIO VISUAL EQUIPMENT

muRata
Innovator in Electronics

SAF Series

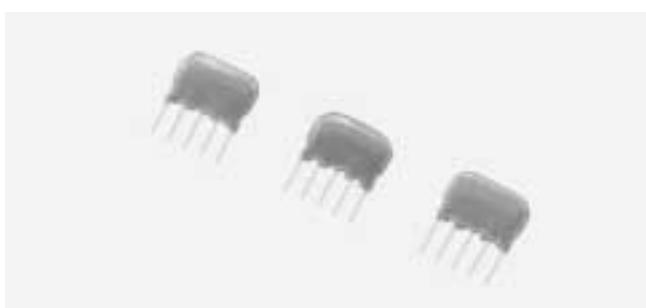


This series of saw filters is designed for TV/VCR applications. These filters are capable of passing 1) SIF and PIF, 2) SIF or 3) PIF. Saw filters are made up of zinc oxide on a glass substrate. Murata provides saw filters for a variety of television standards worldwide.

SPECIFICATIONS

Part Number	Insertion Loss (dB) max.	Picture Carrier (dB)	Chroma Carrier (dB)	Sound Carrier (dB)	Adjacent Sound Carrier (dB) min.	Attenuation at fas +1.0MHz (dB) min.	Attenuation at fap -0.5MHz (dB) min.	Adjacent Picture Carrier (dB) min.	Attenuation at fap -0.5 MHz (dB) min.	Spurious Response (dB) min.	Temperature Coefficient (ppm/°C)
SAF38.9MZ215Z	24.0(19)	5.0 ± 1.2	5.8 ± 1.5	19.0 ± 2	44(56)	42(52)	—	45(50)	—	36	-10 ± 20
SAF38.9MZR80Z	24.0(22)	4.5 ± 1.2	4.5 ± 1.5	22.0 ± 3	40(48)	38(48)	35(45)	40(48)	37(50)	30	-10 ± 20
SAF38.9MZW210Z	22.5(20)	4.5 ± 1.2	3.1 ± 1.0	17.5 ± 3	43(54)	38(52)	38(42)	36(42)	38(42)	33	-10 ± 20


DIMENSIONS: mm

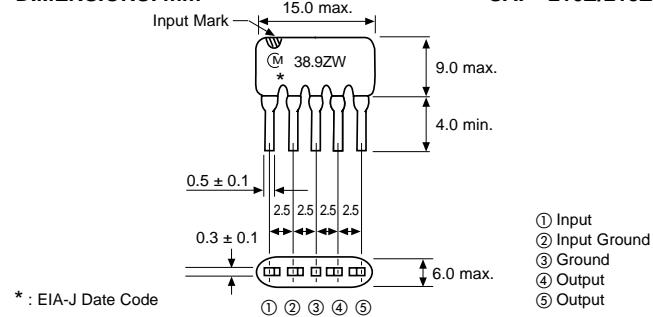

SAF-210Z/215Z

① Input
② Input Ground
③ Ground
④ Output
⑤ Output

DIMENSIONS: mm

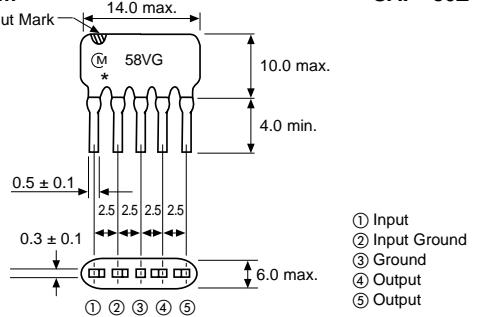


SAF-80Z

① Input
② Input Ground
③ Ground
④ Output
⑤ Output

PIEZO FILTERS


FREQUENCY CHARACTERISTICS

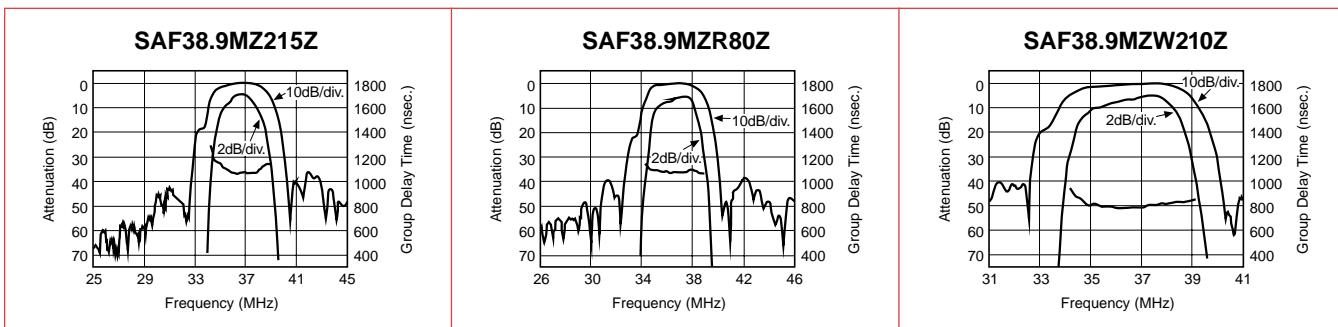

PIEZO FILTERS

SAW FILTERS FOR AUDIO VISUAL EQUIPMENT COLOR TV VIF/VCR

muRata
Innovator in Electronics
SAF Series

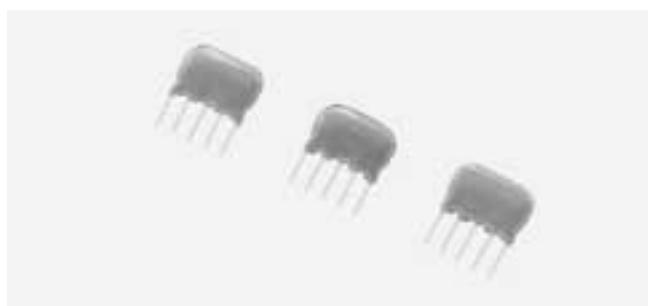


This series of saw filters are designed for TV/VCR applications. These filters are capable of passing SIF, PIF, SIF or PIF. Saw filters are made up of zinc oxide on a glass substrate. Murata provides saw filters for a variety of television standards world wide.

SPECIFICATIONS

SAF


Part Number	Insertion Loss (dB) max.	Picture Carrier (dB)	Chroma Carrier (dB)	Sound Carrier (dB)	Adjacent Sound Carrier (dB) min.	Adjacent Picture Carrier (dB) min.	Spurious Response (dB) min.	Temperature Coefficient (ppm/°C)
SAF58MH210Z	21(17)	4.2 ± 1.2	4.2 ± 1.5	20 ± 3	40(57)	40(53)	30	-28 ± 20
SAF45MA210Z	21(18)	4.0 ± 1.2	4.5 ± 1.5	18 ± 3	40(54)	40(47)	30	-28 ± 20
SAF39.5MZ210Z	25(22)	5.0 ± 1.2	4.5 ± 1.5	20 ± 3	40(52)	40(55)	30	-10 ± 20
SAF38.9MZ210Z	24(19)	5.0 ± 1.2	5.8 ± 1.5	20 ± 3	40(55)	40(47)	30	-10 ± 20
SAF38.0MZ210Z	27(25)	6.0 ± 1.5	6.6 ± 1.5	25 ± 3	40(48)	40(55)	30	-10 ± 20
SAF36.9MZ80Z	25(21)	5.0 ± 1.2	5.0 ± 1.5	20 ± 3	40(50)	40(53)	30	-10 ± 20
SAF32.7MZ80Z	25(22)	6.5 ± 1.5	1.0 ± 1.0	38 min.	40(48)	35(48)	30	-10 ± 20
SAF58MVB200Z	20(15)	4.5 ± 1.2	4.5 ± 1.5	25 min.	40(55)	40(57)	30	-28 ± 20
SAF45MVG200Z	21(19)	4.5 ± 1.2	4.5 ± 1.5	25 min.	40(55)	40(47)	29	-28 ± 20
SAF38.9MVB200Z	24(21)	4.5 ± 1.2	4.8 ± 1.5	25 min.	40(48)	40(55)	30	-10 ± 20

DIMENSIONS: mm

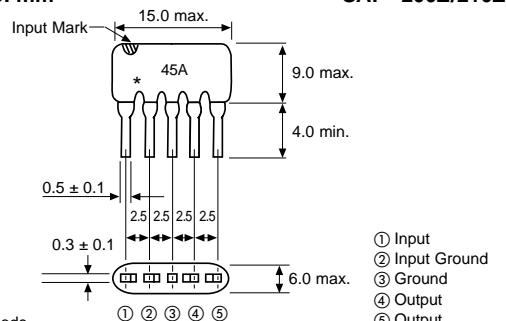

SAF-200Z/210Z

DIMENSIONS: mm

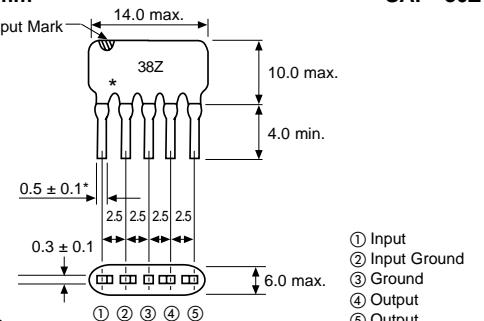


SAF-80Z

- SAF58MVB200Z, SAF45MVG200Z and SAF38.9MVB200Z are for picture IF filters in quasi-parallel or split carrier systems.
- Low-profile type 6.0mm (60Z) is also available.

(): Typ. values


FREQUENCY CHARACTERISTICS

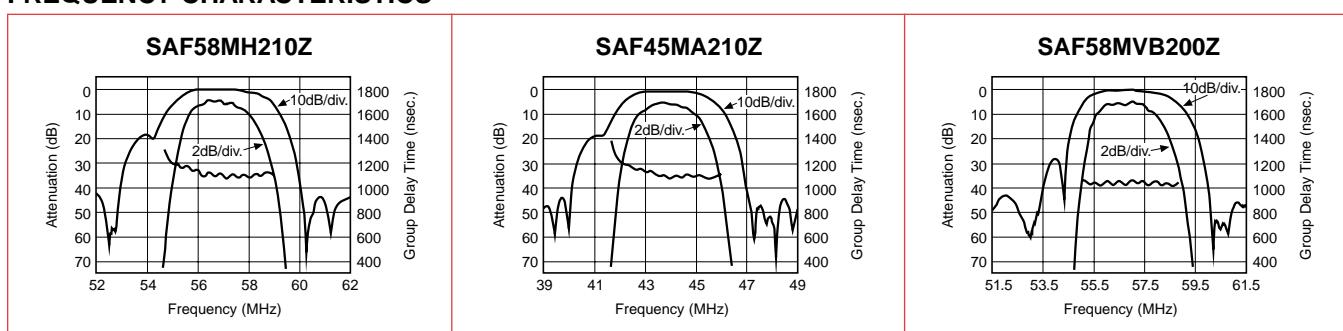

PIEZO FILTERS SAW FILTERS FOR SET TOP BOX (CATV)

muRata
Innovator in Electronics

SAF Series

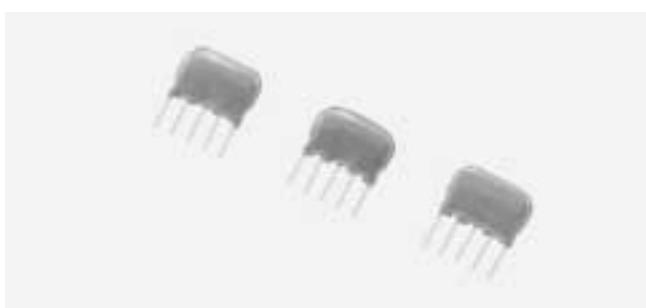

This series of saw filters is designed for TV/VCR applications. These filters are capable of passing 1) SIF and PIF, 2) SIF or 3) PIF. Saw filters are made up of zinc oxide on a glass substrate. Murata provides saw filters for a variety of television standards worldwide.

SPECIFICATIONS


SAF

Part Number	Insertion Loss (dB) max.	Flatness (dB) max.	Lower ch. Picture Carrier (dB) min.	Lower ch. Sound Carrier (dB) min.	Picture Carrier (dB)	Chroma Carrier (dB)	Sound Carrier (dB)	Upper ch. Picture Carrier (dB) min.	Spurious Response (dB) min.	Temperature Coefficient (ppm/°C)
SAF45MT210Z	23	2 ¹⁰	14	—	2 max.	2 max.	2 max.	30	27	-28 ± 20
SAF55MB70Z	21	2	35	8	0	0 ± 1	2 max.	35	26	-28 ± 20
SAF58MT71Z	22	2	14	8	2	2	2	30	27	-28 ± 20
SAF61MB210Z	20	1 ²	35	8	0	0 ± 1	2 max.	35	26 ⁶	-28 ± 20
SAF61MD210Z	23	2 ³	30 ⁴	8 ⁴	2 max. ⁴	2 max.	2 max.	14 ⁴	27	-28 ± 20
SAF61MZ72Z	22	—	30 ⁴	40 ⁴	5.5 ± 1.2 ⁴	5.0 ± 1.5 ⁴	20 ± 3 ⁴	40 ⁴	28	-28 ± 20
SAF67MB70Z	20	2	35	8	0	0 ± 1	2 max.	35	26	-28 ± 20

Note: SAF55MB70Z is full channel pass filter for channel 2. SAF61MB70Z is full channel pass filter for channel 3. SAF67MB70Z is full channel pass filter for channel 4. For channel 2 SAF59.8MA72Z, channel 3 SAF65.8MA72Z and channel 4 SAF71.8MA72Z is the Sound Intermediate Frequency (SIF).


• SAF61MD70Z is a wide-band type. SAF61MZ72Z is for direct detection systems. ★ Reference Point. ²61.25 – 64.83MHz. ⁶61.25 – 65.75MHz. ⁴Reference level (0dB) is the peak value. ⁵50–55.25MHz 67.25–78MHz ⁶0–55.25MHz 67.25–80MHz ⁷0–55.25MHz 68.25–80MHz ⁸30: 0–59.75MHz 28: 67.25–80MHz ¹⁰41.25–45.75MHz

DIMENSIONS: mm

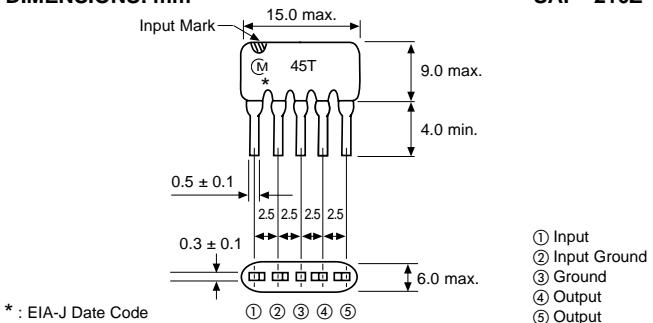

SAF-210Z


DIMENSIONS: mm

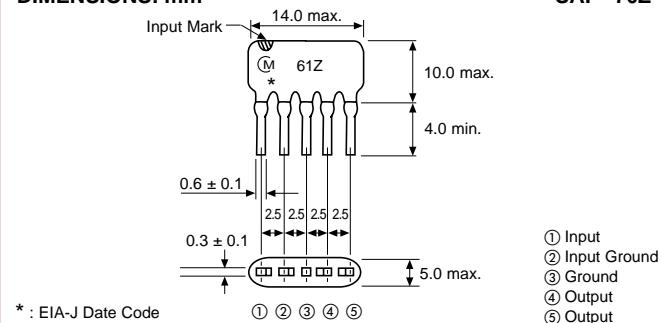


SAF-70Z

FREQUENCY CHARACTERISTICS


SAF45MT210Z

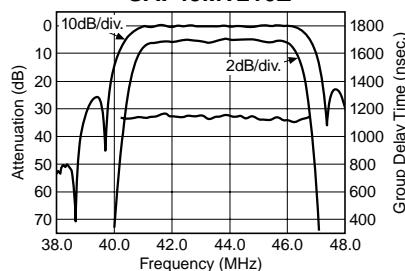


SAF58MT71Z

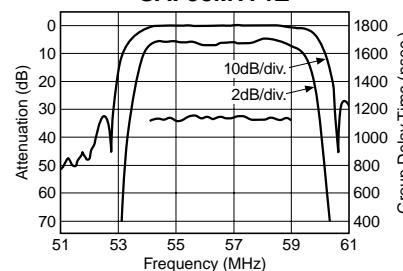


SAF61MB210Z

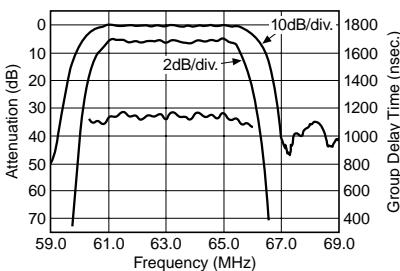

SAF61MD210Z

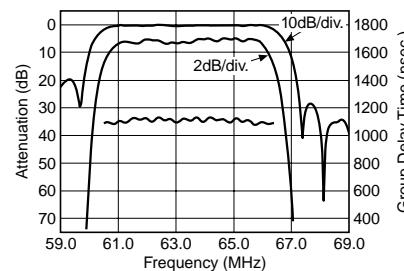

SAF61MZ72Z

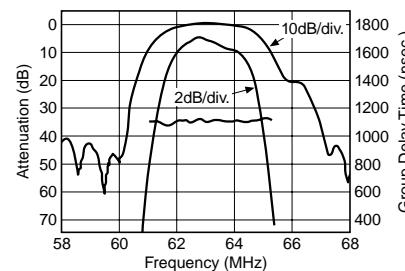


PIEZO FILTERS

SAW FILTERS

FOR SET TOP BOX (CATV)

muRata
Innovator in Electronics
SAF Series

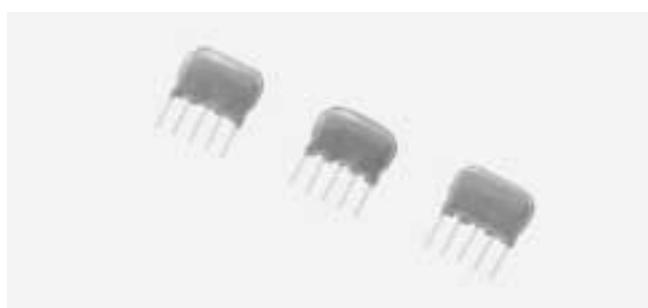

This series of saw filters is designed for TV/VCR applications. These filters are capable of passing 1) SIF and PIF, 2) SIF or 3) PIF. Saw filters are made up of zinc oxide on a glass substrate. Murata provides saw filters for a variety of television standards worldwide.


SPECIFICATIONS

Part Number	Insertion Loss (dB max.)	Picture Carrier (dB)	Attenuation (dB) at fs-0.25MHz	Attenuation (dB) at fs-0.25MHz	Upper ch. Picture Carrier (dB)	Spurious Response (dB) min.	Temperature Coefficient (ppm/°C)
SAF65.8MA72Z	18	—	3	3	—	20*	-28 ± 20
SAF41MCA70Z	17	(40)	(fs - 0.2MHz) 3.5	(fs - 0.2MHz) 3.5	(37)	30	-28 ± 20

* The level at sound carrier frequency (fs) is to be the reference (0dB).

*0-64.7 MHz, 66.8-100MHz.

DIMENSIONS: mm

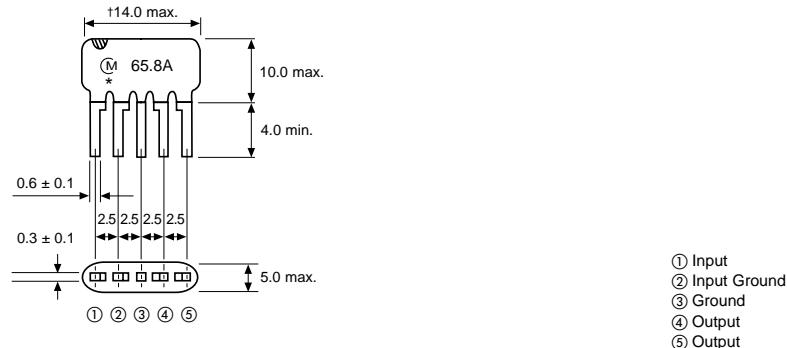


* : EIA-J Date Code


†SAF41MCA70Z = 16.0 max.

FREQUENCY CHARACTERISTICS

SAF65.8MA72Z

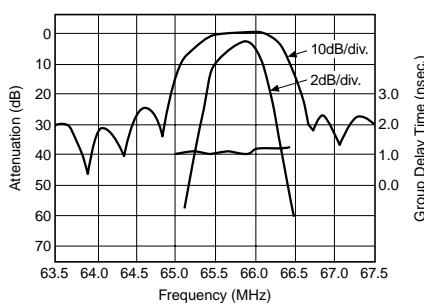

SAF41MCA70Z

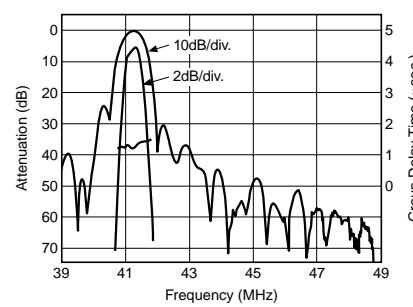


PIEZO FILTERS

SAW FILTERS FOR CABLE MODEM DTV/DIGITAL CATV

NEW

muRata
Innovator in Electronics
SAF Series

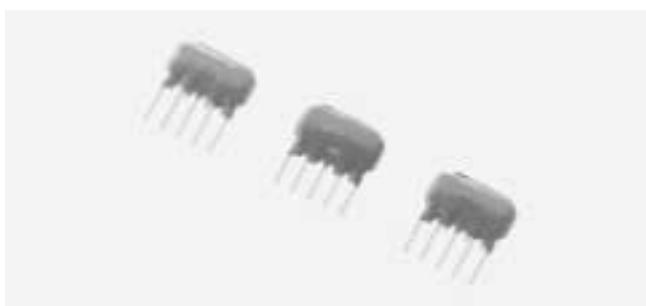

To meet the needs of the newest emerging technologies, Murata now offers a line of SAW filters designed for Digital Television, Digital Cable Television, and Cable Modem applications.


SPECIFICATIONS

SAF MHz

Part Number	SAF44MTC80ZL	SAF44.00MTD220ZL	SAF44.00MTE220ZL
Insertion Loss (at 44.00 MHz)	22.0dB	20.5dB	21.0dB
Amplitude Response dB	39.75MHz	35.0 min.	—
	40.00MHz	—	32.0 min.
	40.50MHz	—	10.0 min.
	41.00MHz	—	3.5 ± 1.5
	41.31MHz	0.7 ± 1.3	—
	41.47MHz	—	0.0 ± 1.2
	46.53MHz	—	0.0 ± 1.2
	46.69MHz	1.5 ± 1.5	—
	47.00MHz	—	3.5 ± 1.5
	47.25MHz	25.0 min.	—
	47.50MHz	—	10.0 min.
	48.00MHz	—	34.0 min.
Amplitude Ripple	1.0dB p-p (41.62 to 46.38MHz)	1.0dB p-p (41.00 to 47.00MHz)	1.0dB p-p (41.00 to 47.00MHz)
GDT Ripple	60 nsec. max. (41.62 to 46.38MHz)	60 nsec. p-p max. (41.00 to 47.00MHz)	60 nsec. p-p max. (41.00 to 47.00MHz)
Spurious Response (dB min.) (Reference Level at 44.00MHz)	30.00 (0.00 to 40.00MHz) 30.00 (48.00 to 55.00MHz)	30.0 (35.00 to 40.00MHz) 28.0 (48.00 to 55.00MHz)	28.00 (0.00 to 40.00MHz) 25.00 (48.00 to 55.00MHz)

DIMENSIONS: mm


SAF-80Z

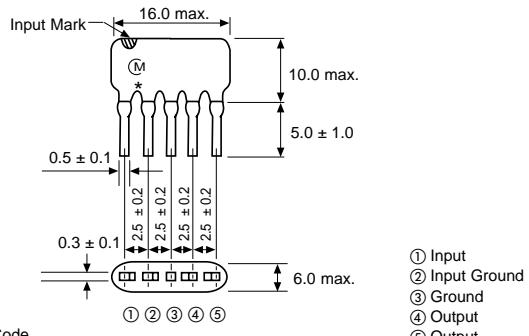

* : EIA-J Date Code


DIMENSIONS: mm

SAF-220Z

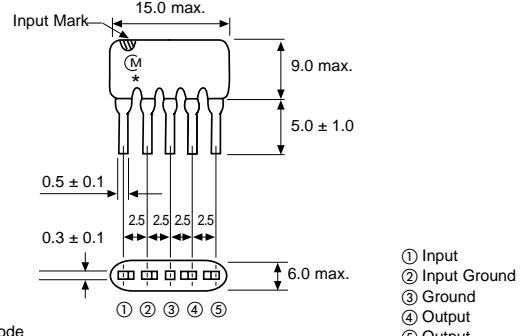

* : EIA-J Date Code

TEST CIRCUIT

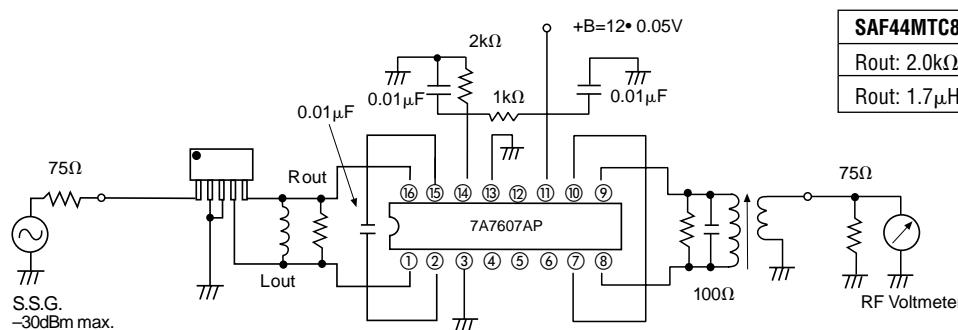


SPECIFICATIONS

Item	Code	Part Number			
		SAF□M80Z-TF/SAF□M200Z-TF		SAF□M80Z-TF01/SAF□M200Z-TF01	
		Nominal Value	Allowable Value	Nominal Value	Allowable Value
Portion to cut in case of defect	L ₁	3	min.	3	min.
Pitch of component	P	25.4	±0.5	25.4	±0.5
Pitch of sprocket hole	P ₀	12.7	±0.2	12.7	±0.2
Feed hole position to SAW filter terminal	P ₁	3.85	±0.5	3.85	±0.5
Feed hole position to SAW filter terminal	P ₂	6.35	±0.5	6.35	±0.5
Terminal spacing ⁽¹⁾	F	5.0	+0.5 -0.2	5.0	+0.5 -0.2
Terminal spacing ⁽²⁾	F ₁	2.5	±0.2	2.5	±0.2
Deviation across tape	△h	0	±1.0	0	±1.0
Deviation along tape, left or right	△s	0	±1.0	0	±1.0
Carrier tape width	W	18.0	±0.5	18.0	±0.5
Hold-down tape width	W ₀	6.0	min.	6.0	min.
Position of sprocket hole	W ₁	9.0	±0.5	9.0	±0.5
Hold-down tape width	W ₂	0	±0.5	0	±0.5
Distance between reference and terminal	H ₀	16.0	±0.5	18.0	±0.5
Height of terminal stopper	H	19.25	±0.5	21.25	±0.5
Distance between reference and top	H ₁	32.0	max.	32.0	max.
Diameter of sprocket hole	D ₀	Φ4.0	±0.2	Φ4.0	±0.2
Total tape thickness	t	0.6	±0.2	0.6	±0.2

DIMENSIONS: mm

SAF□M200Z-TF01/SAF□M80Z-TF01

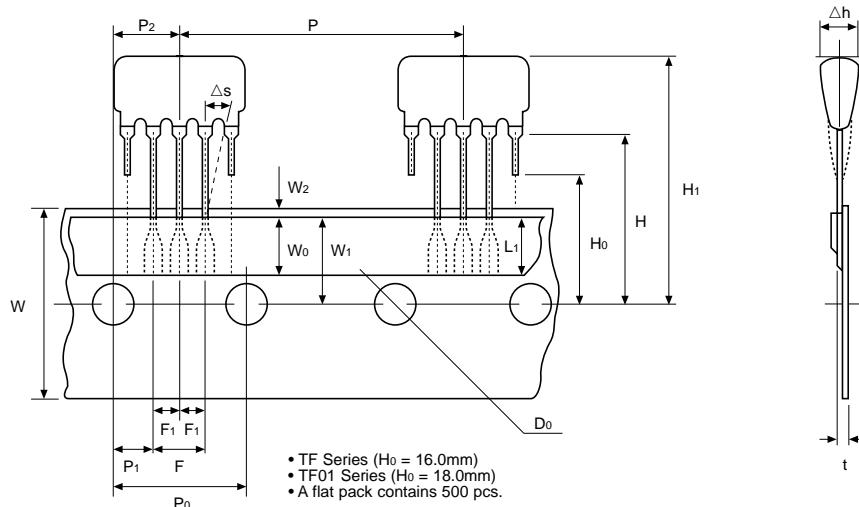

The differences between TF and TF01 are only the dimensions of H₀ (16mm or 18mm) and H (19.25mm or 21.25mm).

PIEZO FILTERS

HIGH FREQUENCY TRAP FOR TV/VCR APPLICATIONS

A red rectangular stamp with the word "NEW" written in white, bold, sans-serif capital letters, tilted diagonally.

The image shows the muRata logo, which consists of the word "muRata" in a stylized, italicized font inside a red rectangular box. Below the box, the words "Innovator in Electronics" are written in a smaller, italicized font. At the bottom, the words "MKT Series" are displayed in a large, bold, black sans-serif font.



MKT is a high frequency trap for television or other similar systems.

SPECIFICATIONS

Part Number	Nominal Center Frequency (MHz)	10dB Band Width (kHz) min.	Ripple (dB) max.	*Attenuation (dB) max.
MKT47.3MA110P	47.25	65	1.0	2.0
MKT40.4MA110P	40.4	65	1.0	2.0
MKT31.9MA110P	31.9	65	1.0	2.0

DIMENSIONS: mm


CIRCUIT

*Attenuation at fp

- Attenuation MKT40.4MA110P: 38.9MHz point, MKT31.9MA110P: 33.4MHz point.

- 30.9MHz, 39.5MHz, 47.25MHz and 60.25MHz types are also available.

FREQUENCY CHARACTERISTICS

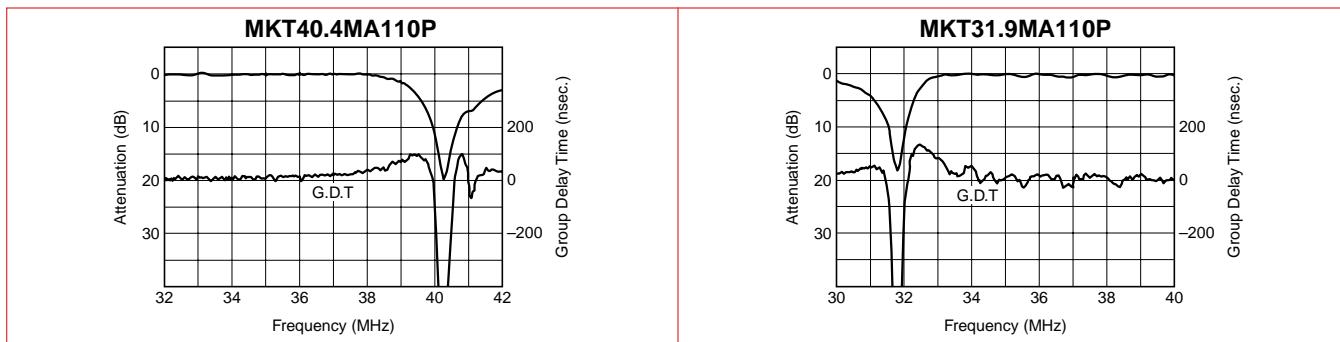

PART NUMBER LIST

Part Number	Nominal Center Frequency (MHz)	Picture Carrier (fp) (MHz)	System	Application	Matching Impedance (R/L) (Ohms/nH)
MKT30.0MA110P	30.0	38.0	B/G/I/D/K	fap	20/-
MKT32.0MA110P	32.0	38.0	M	fap	20/-
MKT39.5MA110P	39.5	38.0	B/G/I/D/K/M	fas	33/220
MKT30.9MA110P	30.9	38.9	I/D/K	fap	20/-
MKT31.9MA110P	31.9	38.9	B/G	fap	20/-
MKT40.4MA110P	40.4	38.9	B/G/I/D/K	fas	33/220
MKT31.5MA110P	31.5	39.5	I	fap	20/-
MKT41.5MA110P	41.5	39.5	I	fas	33/220
MKT31.2MA110P	31.2	32.7	L	fas	20/-
MKT40.7MA110P	40.7	32.7	L	fap	33/220
MKT39.8MA110P	39.75	45.75	M	fap	20/-
MKT47.3MA110P	47.25	45.75	M	fas	27/180
MKT52.8MA110P	52.75	58.75	M	fap	10/-
MKT60.3MA110P	60.25	58.75	M	fas	22/150

- Available frequency range: Center frequency 30 to 70MHz.

- Application fap: For adjacent picture frequency.

- Application fas: For adjacent sound frequency.